



STAIRS PUMPS

STAIRS SP SERIES STAINLESS STEEL SUBMERSIBLE PUMPS

50Hz

www.stairs.com.tw



STAIRS INDUSTRIAL CO., LTD.

Stairs **SP** Series



STAIRS PUMPS

Index

General Data

Performance Range	2
Material Specification	3
4" Submersible Pumps	6
6" Submersible Pumps	7
8" Submersible Pumps	8


Performance Curves/Technical Data

Series SP05	9
Series SP10	11
Series SP18	13
Series SP25	15
Series SP40	17
Series SP70	19
Series SP90	21
Series SP150	23
Series SP230	25
Series SP300	27
Series SP400	29
Series SP500	31

SP Series 4", 6", 8" Stainless Steel Submersible Pumps

SP 4", 6" and 8" submersible pumps are made of corrosion and abrasion resistant stainless steel and have been developed in accordance with state-of-the-art technology. The SP series of pumps are manufactured to the highest standards for energy efficiency, dependable performance, rugged construction and long service life for the most demanding applications.


Performance range

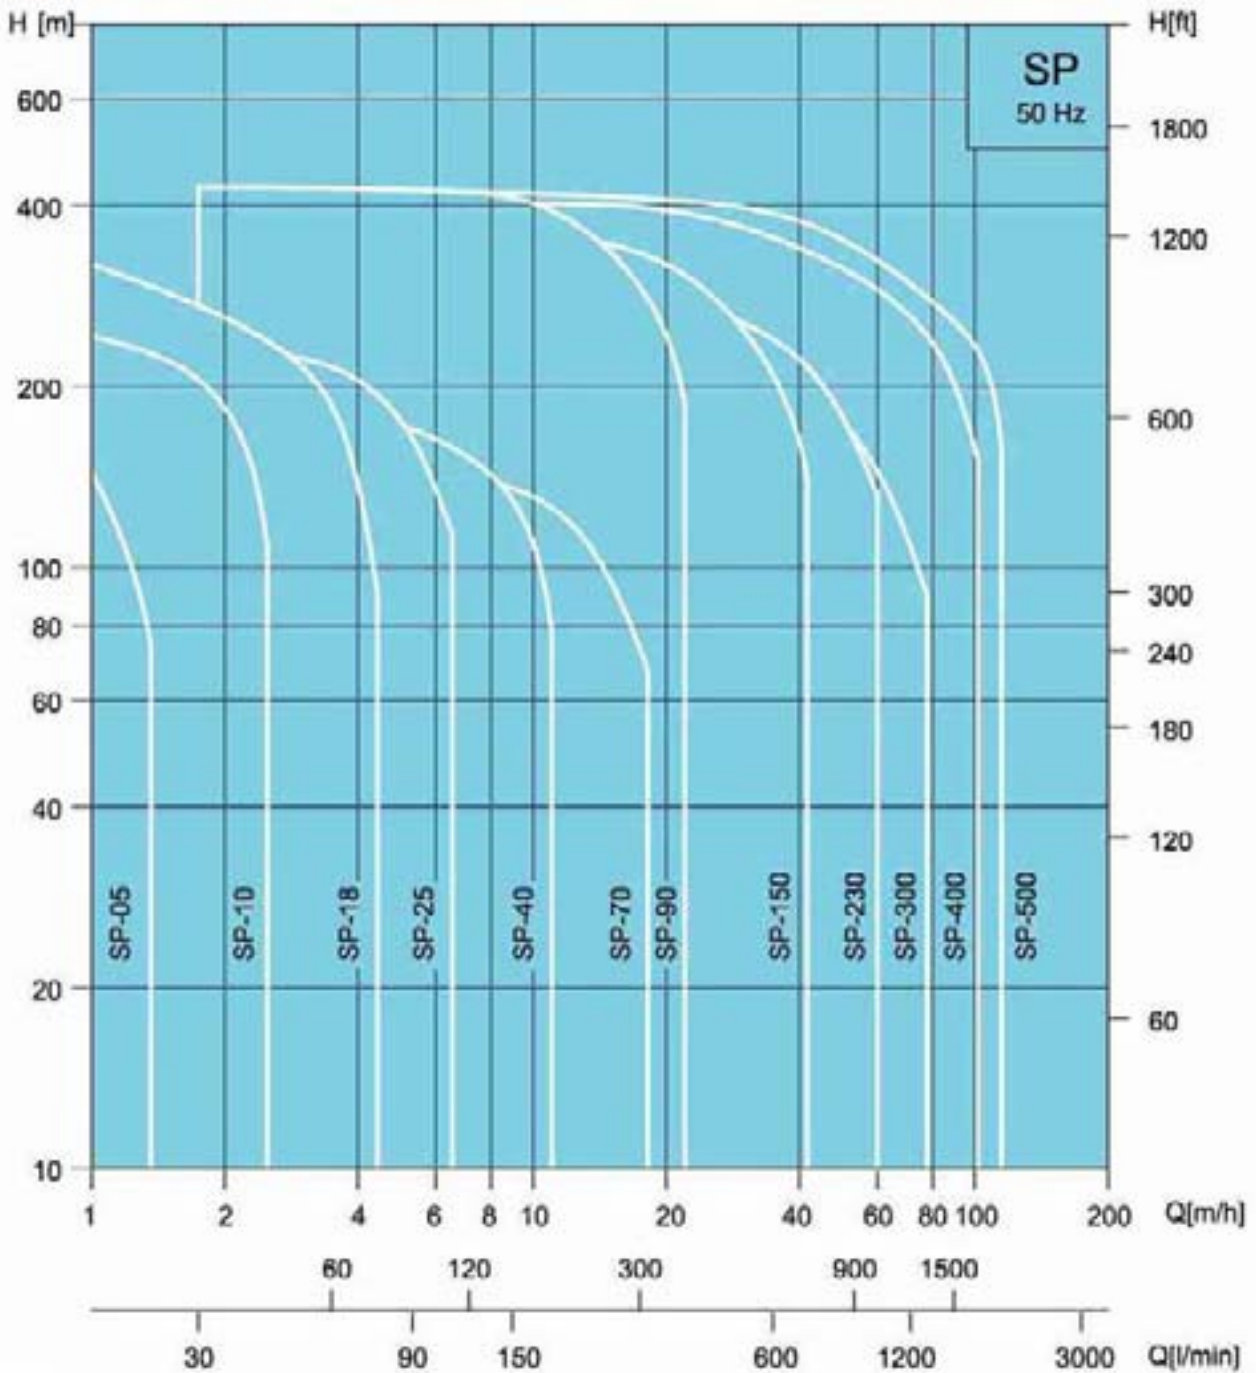

General Data



Example: SP-70

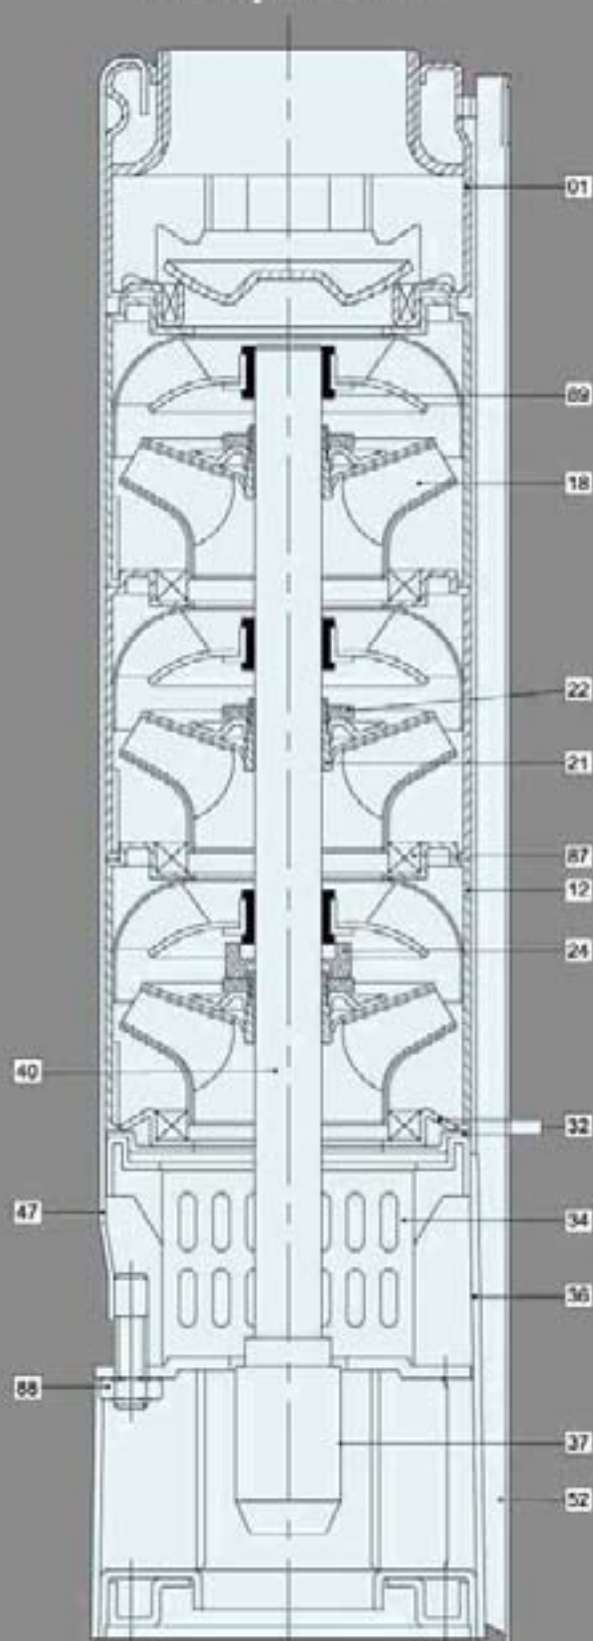


Material Specification-4" Pumps

Pos.	Components	Material	Standard
01	Discharge	Stainless Steel	304
12	Diffuser	Stainless Steel	304
18	Impeller	Stainless Steel	304
21	Split Cone	Stainless Steel	304
22	Split Cone Nut	Stainless Steel	304
24	Stop Ring	Carbon/ Graphite/PTFE	
32	Neck Ring Retainer	Stainless Steel	304
34	Strainer	Stainless Steel	304
36	Suction Interconnector	Stainless Steel	304
40	Pump Shaft	Stainless Steel	431
37	Coupling	Stainless Steel	304
47	Strap	Stainless Steel	304
52	Cable Guard	Stainless Steel	304
87	Neck Ring	SUS304+NBR	
88	Nut	Stainless Steel	304
89	Bearing	NBR	

General Data



Example: SP-90

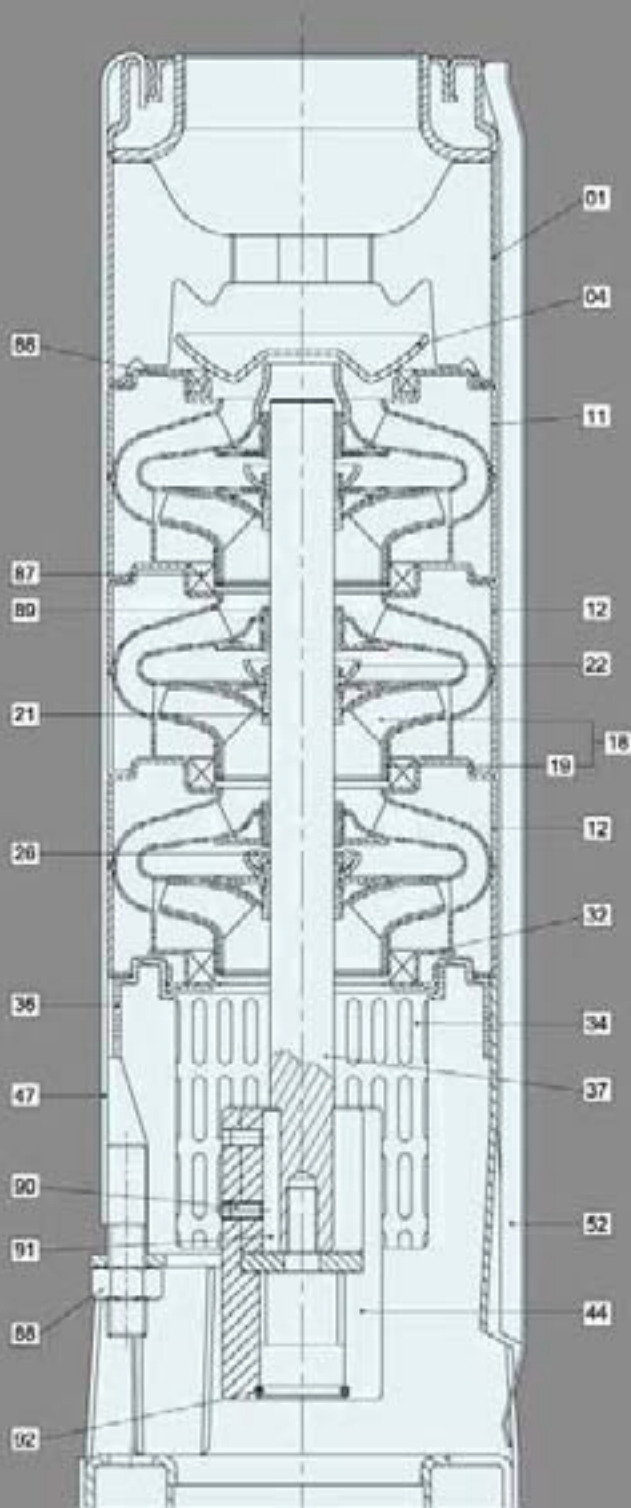

Material Specification-6" Pumps


Pos.	Components	Material	Standard
01	Discharge	Stainless Steel	304
04	Valve Cone	Stainless Steel	304
11	Top Diffuser	Stainless Steel	304
12	Diffuser	Stainless Steel	304
18	Impeller	Stainless Steel	304
19	Ring Of Impeller	Stainless Steel	304
21	Split Cone	Stainless Steel	304
22	Split Cone Nut	Stainless Steel	304
26	Spacing Washer For Stop Ring	Carbon/ Graphite/PTFE	
32	Neck Ring Retainer	Stainless Steel	304
34	Strainer	Stainless Steel	304
36	Suction Interconnector	Stainless Steel	304
37	Pump Shaft	Stainless Steel	431
44	Coupling	Stainless Steel	304
47	Strap	Stainless Steel	304
52	Cable Guard	Stainless Steel	304
86	Valve Seat	SUS304+NBR	
87	Neck Ring	SUS304+NBR	
88	Nut	Stainless Steel	304
89	Bearing	NBR	
90	Screw	Stainless Steel	304
91	Key	Stainless Steel	304
92	O-ring	NBR	

General Data



Example: SP500

Material Specification-8" Pumps

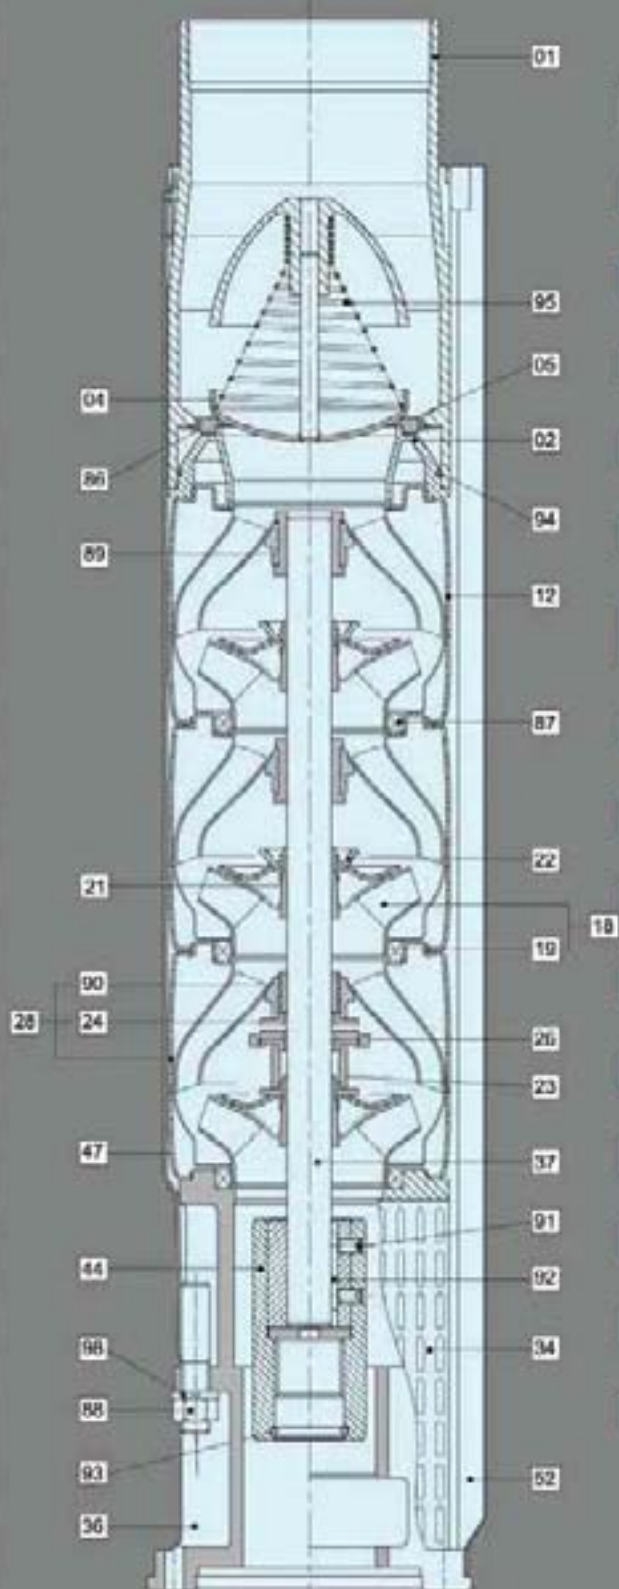

Pos.	Components	Material	Standard
01	Discharge	Stainless Steel	304
02	Lower Valve Seat Retainer	Stainless Steel	304
04	Valve Cup	Stainless Steel	304
05	Upper Valve Seat Retainer	Stainless Steel	304
12	Diffuser	Stainless Steel	304
18	Impeller	Stainless Steel	304
19	Ring Of Impeller	Stainless Steel	304
21	Split Cone	Stainless Steel	304
22	Split Cone Nut	Stainless Steel	304
23	Nut For Stop Ring	Stainless Steel	304
24	Stop Ring	Stainless Steel	304
26	Spacing Washer For Stop Ring	Carbon/ Graphite/PTFE	
28	Bottom Diffuser	Stainless Steel	304
34	Strainer	Stainless Steel	304
36	Suction Interconnector	Stainless Steel	304
37	Pump Shaft	Stainless Steel	431
44	Coupling	Stainless Steel	304
47	Strap	Stainless Steel	304
52	Cable Guard	Stainless Steel	304
86	Valve Seat	NBR	
87	Neck Ring	SUS304+NBR	
88	Nut	Stainless Steel	304
89	Bearing	NBR	
90	Bearing	NBR+SUS304	
91	Screw	Stainless Steel	304
92	Key	Stainless Steel	304
93	O-ring	NBR	
94	O-ring	NBR	
95	Spring	Stainless Steel	304
98	Spring Washer	Stainless Steel	304

4" Stainless Steel Submersible Pumps

Stairs' SP 4" range of submersible pumps are made of corrosion and abrasion resistant stainless steel and have been developed in accordance with state-of-the-art technology. The SP 4" pumps are manufactured to the highest standards for energy efficiency, dependable performance, rugged construction, and long service life.

Capacity (m³/h) min 0.3 max 18
 Total Head: Max. 285 m



Applications

- ◆ Potable water supply from deep wells
- ◆ Agricultural-irrigation, livestock watering, etc.
- ◆ Municipal and industrial
- ◆ Pressure boosting
- ◆ Fountains, etc.

Pumped Liquids

- ◆ Clean, non-corrosive and non-abrasive liquids.

Operating Conditions

- ◆ Max. ambient temperature (Liquid): 30°C
- ◆ Sand content: Max. 50 g/m³

Features

- ◆ Stainless steel construction designed and built for years of trouble free operation
- ◆ All metal parts are made of 304 stainless steel, except for the shaft, which is made of 431 stainless steel
- ◆ Heavy duty stainless steel discharge head with built-in check valve for long life and ease of installation
- ◆ Smooth safety hook
- ◆ Mounting specifications are according to NEMA standards
- ◆ High quality shaft bearings providing low friction and high wear resistance
- ◆ Heavy duty stainless steel impellers & diffusers ensuring optimal performance
- ◆ Stainless steel strainer to restrict the entry of sand and other extraneous material

General Data



6" Stainless Steel Submersible Pumps

Stairs' SP 6" stainless steel submersible pumps are made of high quality 304 or 316 corrosion resistant stainless steel. Shafts are made of high strength 431 stainless steel. The pumps are designed for efficient and dependable performance, and a long and trouble-free life. The pumps are light in weight and ruggedly constructed for heavy duty applications.

Capacity (m³/h) min 3 max 78
Total Head: Max. 433 m

Applications

- ◆ Potable water supply from deep wells
- ◆ Agricultural-irrigation and livestock watering
- ◆ Municipal and industrial water supply
- ◆ Pressure boosting
- ◆ Mine de-watering
- ◆ Fountains, etc.

Pumped Liquids

- ◆ Clean, non corrosive and non-abrasive liquids.

Operating Conditions

- ◆ Max. ambient temperature (Liquid): 30°C
- ◆ Sand content: Max. 50 g/m³

Features

- ◆ Stainless steel construction designed and built for years of trouble free operation
- ◆ Heavy duty stainless steel discharge head with built-in check valve for long life and ease of installation
- ◆ Mounting specifications are according to NEMA standards
- ◆ High quality shaft bearings providing low friction and high wear resistance
- ◆ Heavy duty stainless steel impellers & diffusers ensuring optimal performance
- ◆ Stainless steel strainer to restrict the entry of sand and other extraneous material



8" Stainless Steel Submersible Pumps

Stairs' SP 8" submersible pumps are designed for heavy duty and high volume pumping applications. Highly efficient hydraulic impeller and diffuser designs reduce energy requirements and provide long and dependable service life, even in difficult environments.

Capacity (m³/h) min 12 max 120

Total Head: Max. 412 m

Applications

- ◆ Municipal water supply and distribution
- ◆ Municipal water treatment
- ◆ Industrial-for cooling, cleaning and production
- ◆ Agriculture-for irrigation, etc.
- ◆ Pressure boosting in high rise buildings, etc.
- ◆ Dewatering in mines
- ◆ Fountains, etc.

Pumped Liquids

- ◆ Clean, non corrosive and non-abrasive liquids.

Operating Conditions

- ◆ Max. ambient temperature (Liquid): 30°C
- ◆ Sand content: Max. 50 g/m³

Features

- ◆ High pump efficiency means lower energy consumption and thus lower operating costs
- ◆ Designed and built to operate under difficult conditions
- ◆ High quality materials and high quality workmanship assures high quality pumps
- ◆ All metal parts are made of 304 stainless steel, except for the shafts, which are made of 431 stainless steel
- ◆ 431 stainless steel pump shafts assure strength with resistance to mechanical wear and corrosion
- ◆ Heavy duty stainless steel discharge head with built-in check valve for long life and ease of installation
- ◆ A high strength stainless steel coupling facilitates a proper pump/motor alignment
- ◆ Mounting specifications are according to NEMA standards




Stairs SP Series



SP 4"

SP05 Performance Curves

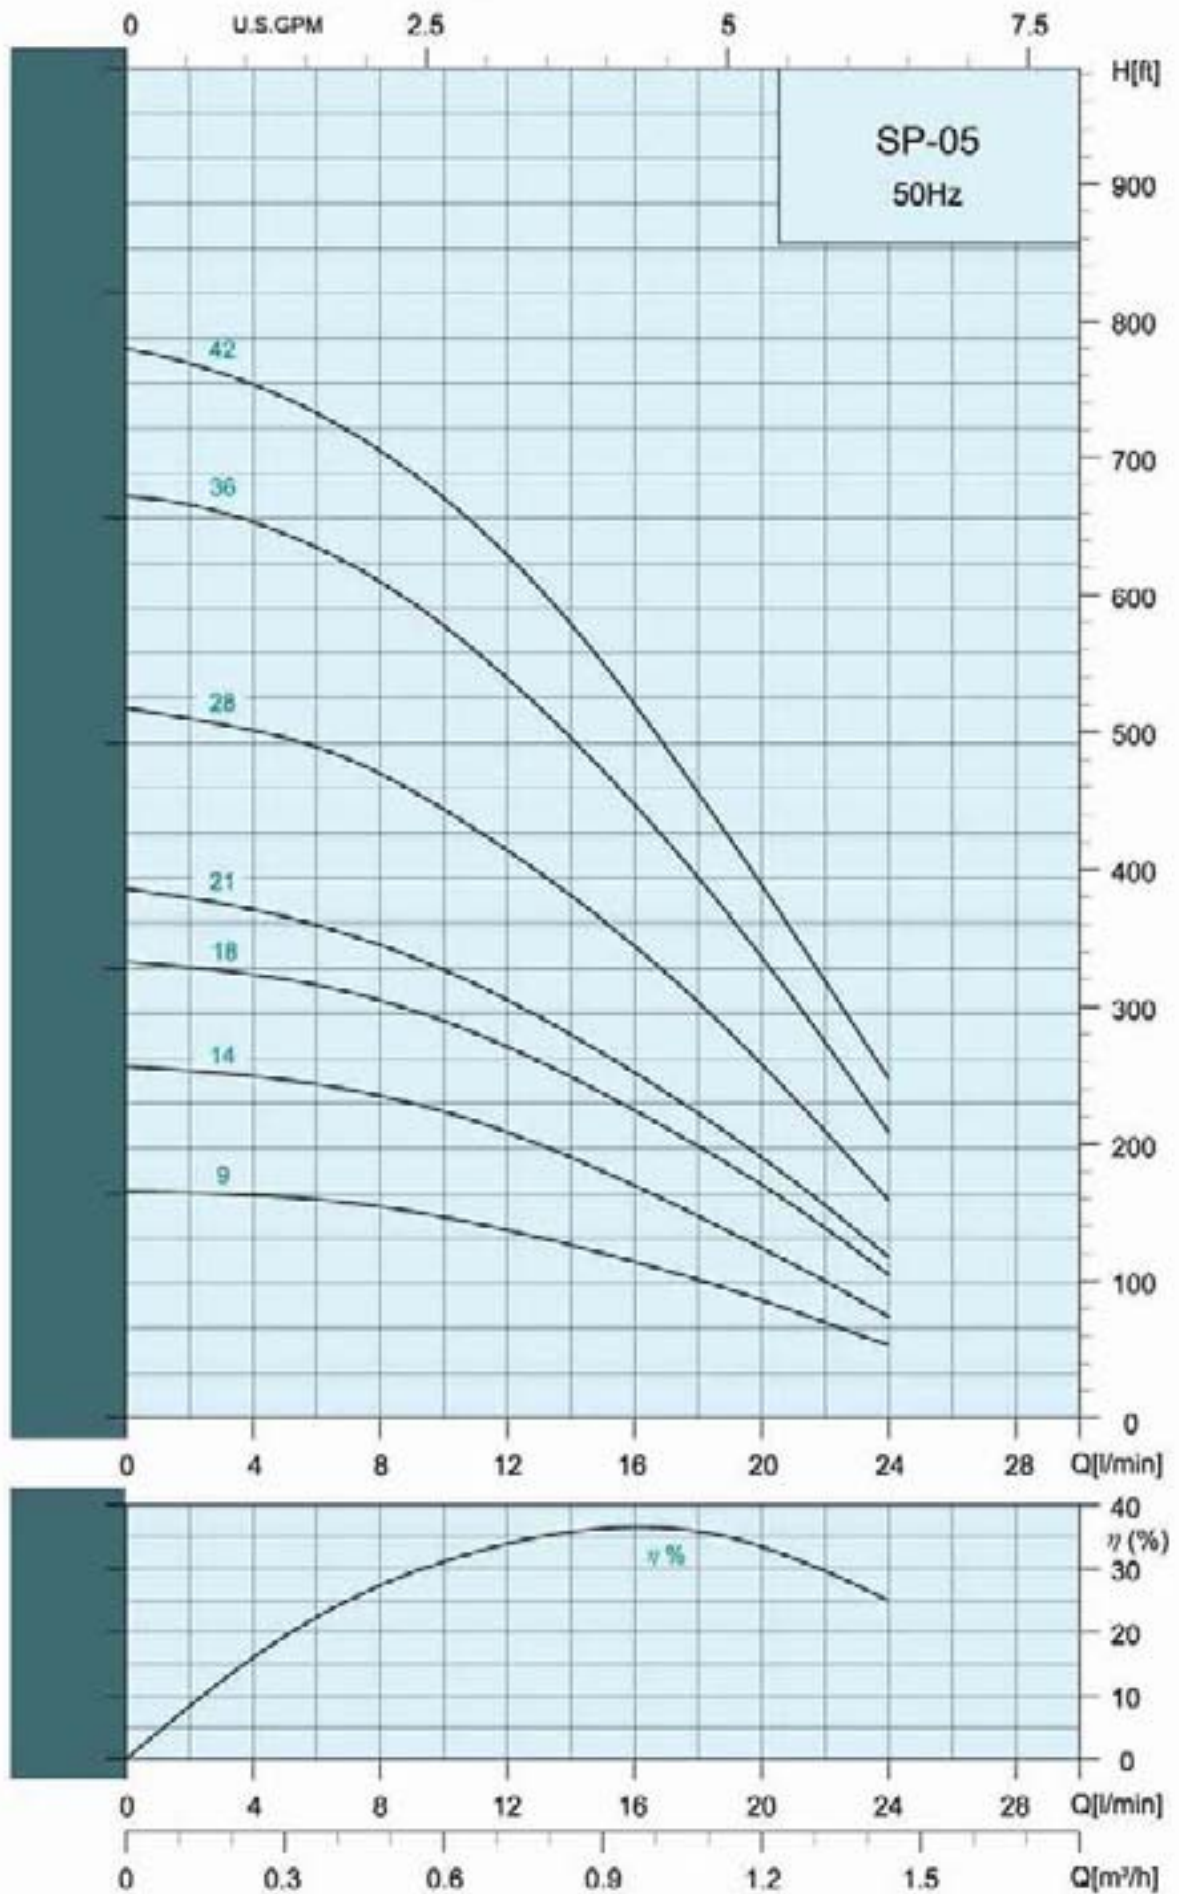


Technical Data

Selection Chart

Pump Type	STAGES	KW	HP	Q=DELIVERY																
				H = TOTAL HEAD IN METERS																
				l/min	0	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100
m ³ /h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	7.2			
SP-0509	9	0.37	0.5	52	48	45	38	27	14											
SP-0514	14	0.37	0.5	79	76	68	56	38	21											
SP-0518	18	0.55	0.75	102	96	88	72	52	27											
SP-0521	21	0.55	0.75	118	112	100	81	58	30											
SP-0528	28	0.75	1.0	158	153	138	111	78	42											
SP-0536	36	1.1	1.5	205	195	175	134	103	54											
SP-0542	42	1.1	1.5	238	235	203	167	118	67											

Dimensions And Weights

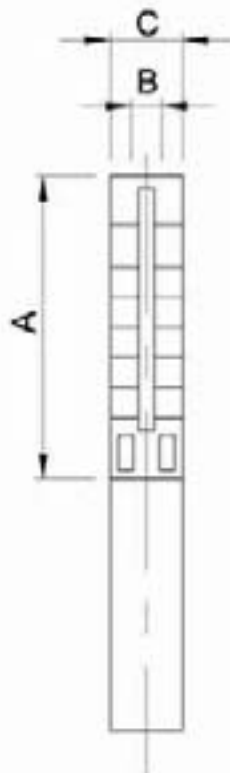

Pump Type	Dimensions(mm)			Net Weight(Kg)
	A	B	C	Pump
SP-0509	356	RP/NPT 1 1/4"	98	2.9
SP-0514	461		98	3.7
SP-0518	545		98	4.4
SP-0521	608		98	5.0
SP-0528	755		98	6.2
SP-0536	946		98	9.9
SP-0542	1072		98	11.3


C = Maximum diameter of pump inclusive of cable guard and motor

Stairs SP Series



SP 4"


SP10 Performance Curves

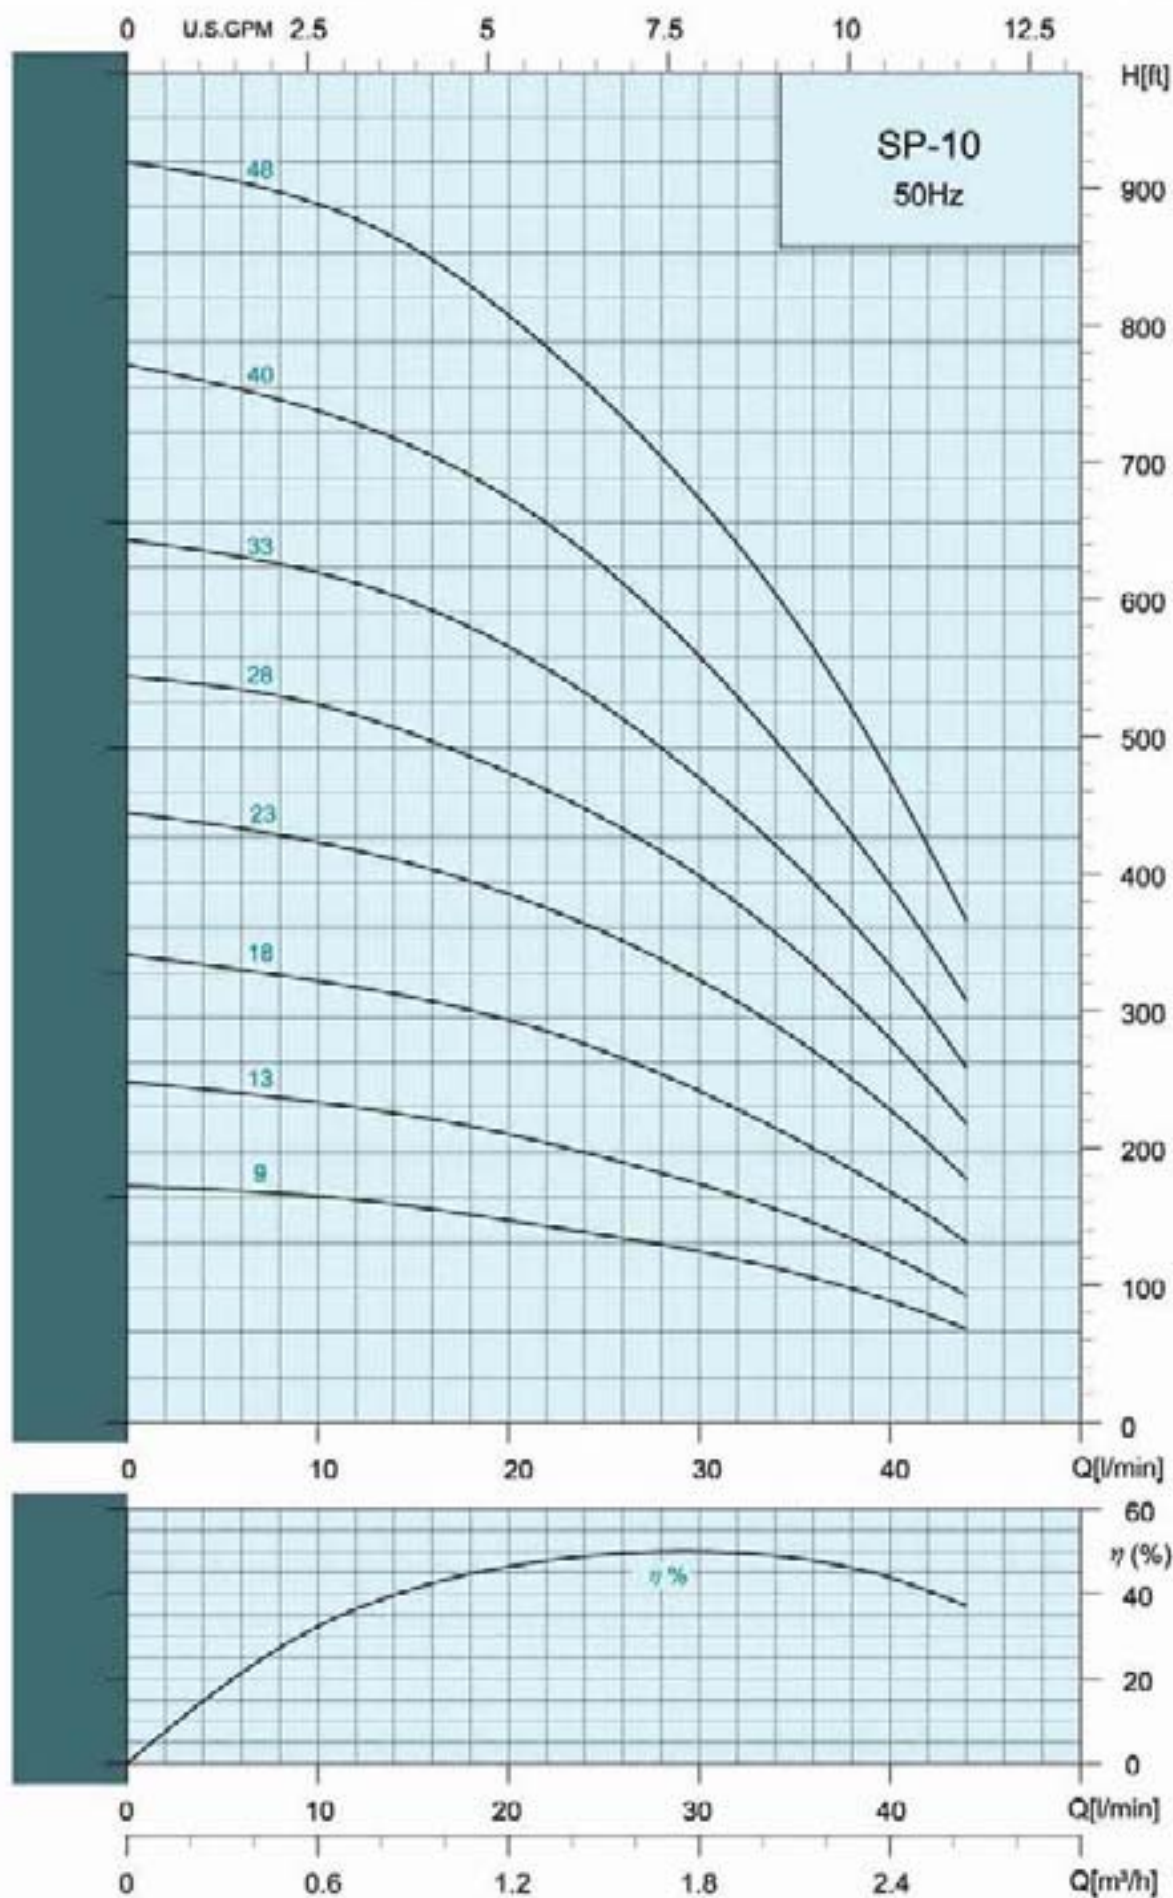

Selection Chart

Pump Type	STAGES	KW	HP	Q-DELIVERY																
				l/min	0	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100
				m ³ /h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0
				H-TOTAL HEAD IN METERS																
SP-1009	9	0.37	0.5	53				48	45	42	38	33	26							
SP-1013	13	0.55	0.75	77				68	64	58	54	46	38							
SP-1018	18	0.75	1.0	104				94	89	83	74	64	51							
SP-1023	23	1.1	1.5	136				124	118	108	98	84	69							
SP-1028	28	1.5	2.0	166				154	145	134	122	105	86							
SP-1033	33	1.5	2.0	185				183	173	159	143	124	102							
SP-1040	40	2.2	3.0	235				218	205	190	170	147	119							
SP-1048	48	2.2	3.0	280				261	246	228	204	178	143							

Dimensions And Weights

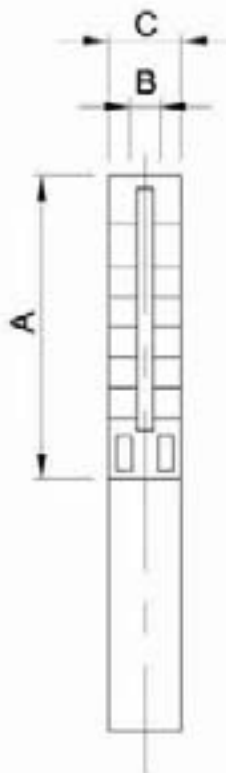

Pump Type	Dimensions(mm)			Net Weight(Kg)
	A	B	C	Pump
SP-1009	356	RP/NPT 1 1/4"	98	3.0
SP-1013	440		98	3.8
SP-1018	545		98	4.7
SP-1023	650		98	5.7
SP-1028	755		98	6.6
SP-1033	883		98	9.7
SP-1040	1030		98	11.5
SP-1048	1198		98	13.5

C = Maximum diameter of pump inclusive of cable guard and motor


Stairs SP Series



STAIRS PUMPS

SP 4"


SP18 Performance Curves

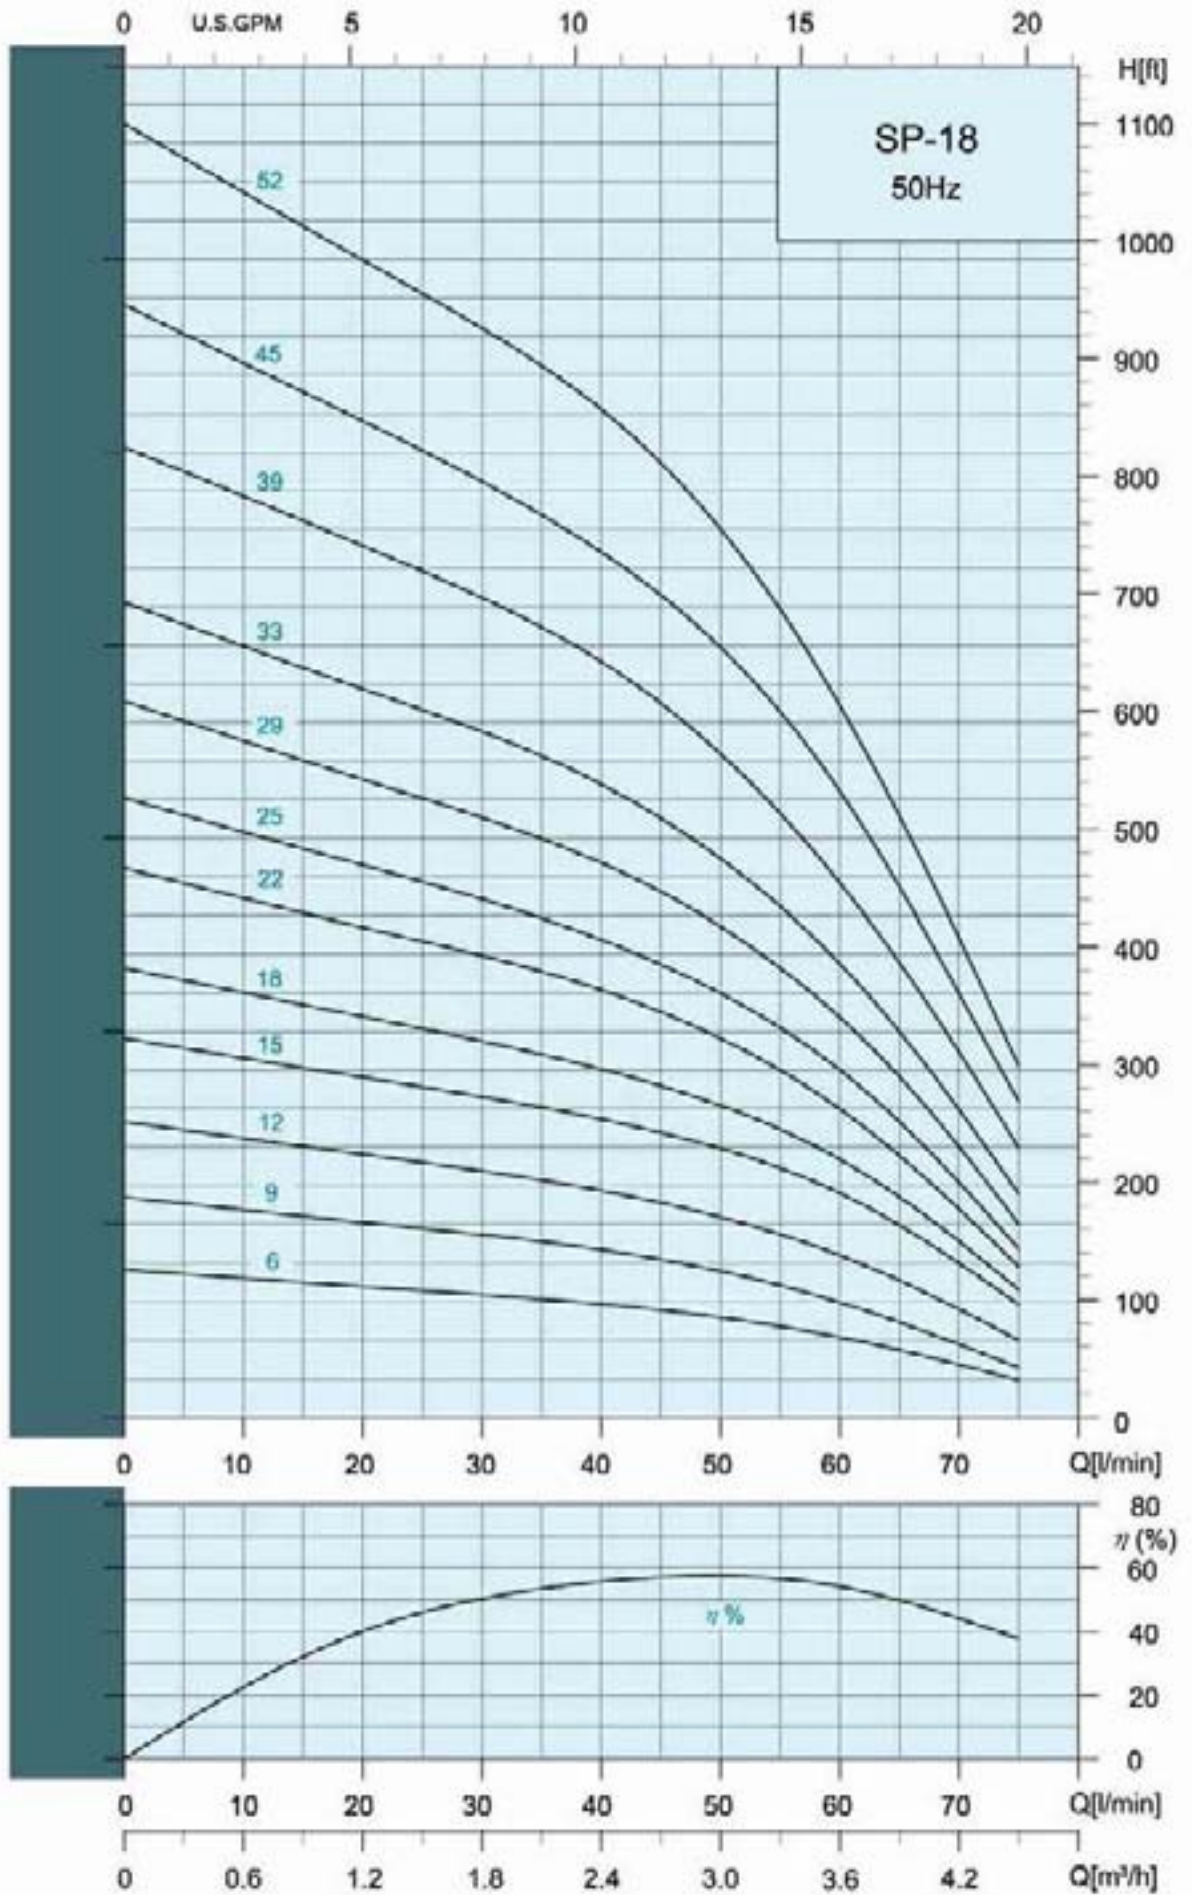

Selection Chart

Pump Type	STAGES	KW	HP	Q=DELIVERY																											
				l/min	0	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120										
				m ³ /h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	7.2										
				H = TOTAL HEAD IN METERS																											
SP-1806	6	0.37	0.5	38						33	32	31	30	28	28	22	14														
SP-1809	9	0.55	0.75	57						48	47	46	44	41	38	30	19														
SP-1812	12	0.75	1.0	77						66	64	62	58	56	52	43	28														
SP-1815	15	1.1	1.5	97						85	83	80	77	74	69	57	40														
SP-1818	18	1.1	1.5	116						101	97	94	90	85	80	67	45														
SP-1822	22	1.5	2.0	143						127	120	115	110	105	97	80	54														
SP-1825	25	1.5	2.0	160						139	134	128	124	117	110	90	60														
SP-1829	29	2.2	3.0	185						160	155	149	143	136	127	103	70														
SP-1833	33	2.2	3.0	211						183	177	172	164	155	145	118	80														
SP-1839	39	3.0	4.0	250						219	213	204	195	185	172	138	94														
SP-1845	45	3.0	4.0	288						250	243	233	224	213	199	162	110														
SP-1852	52	4.0	5.5	334						291	282	272	261	247	230	184	123														

Dimensions And Weights

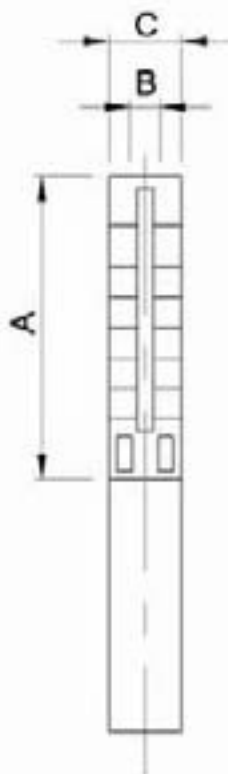

Pump Type	Dimensions(mm)			Net Weight(Kg)
	A	B	C	
SP-1806	293	RP/NPT 1 1/4"	98	2.4
SP-1809	356		98	3.0
SP-1812	419		98	3.6
SP-1815	482		98	4.2
SP-1818	545		98	4.7
SP-1822	629		98	5.5
SP-1825	692		98	6.1
SP-1829	776		98	6.8
SP-1833	883		98	9.7
SP-1839	1009		98	11.2
SP-1845	1135		98	12.7
SP-1852	1282		98	14.5

C = Maximum diameter of pump inclusive of cable guard and motor


Stairs SP Series



STAIRS PUMPS

SP 4"


SP25 Performance Curves

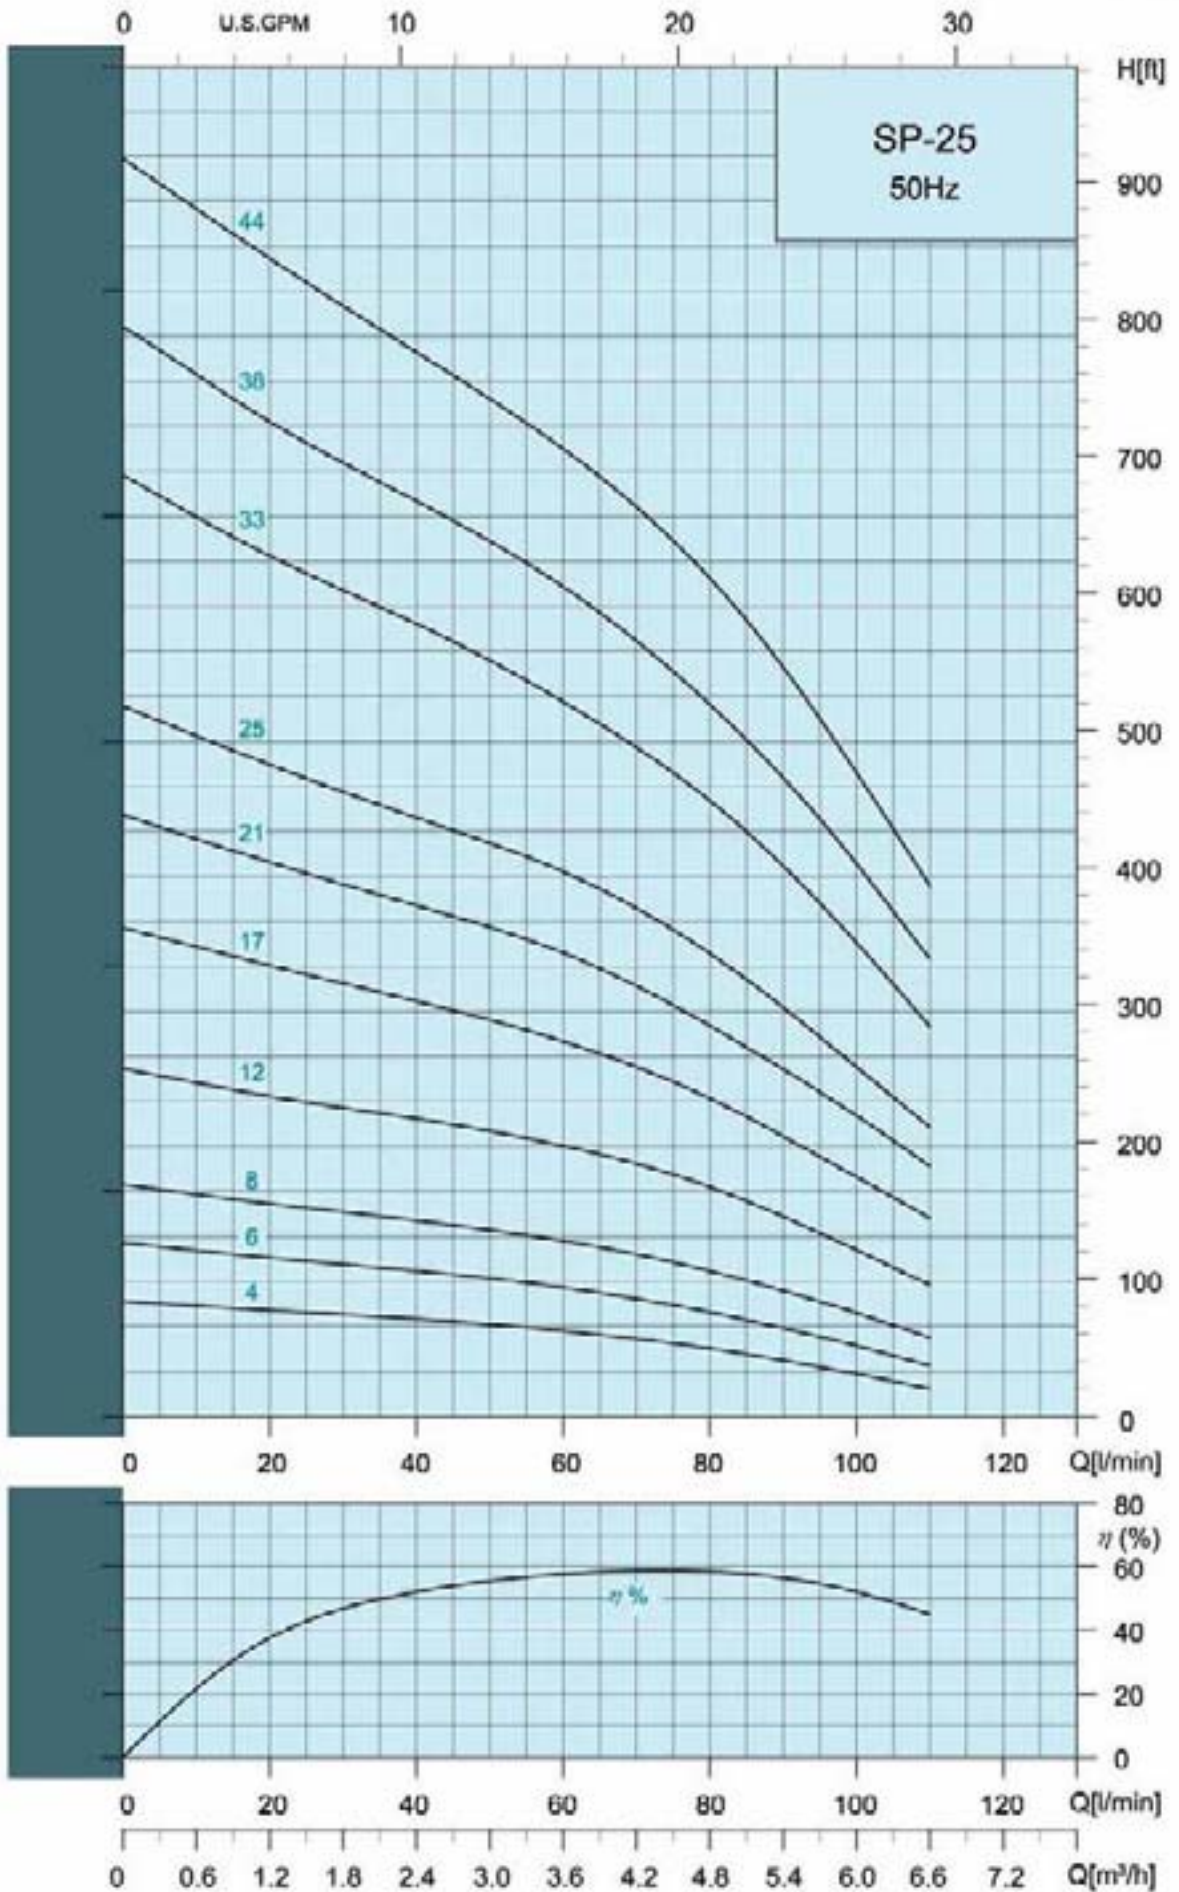

Selection Chart

Pump Type	STAGES	KW	HP	Q=DELIVERY																		
				l/min	0	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	
				m ³ /h	0	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	7.2	8.4	9.6	
				H = TOTAL HEAD IN METERS																		
SP-2504	4	0.37	0.5	25					23	22	21	20.5	20	19	17	15	13	10				
SP-2506	6	0.55	0.75	38					34	33	32	31	30	28	26	24	20	16				
SP-2508	8	0.75	1.0	52					45	44	43	42	41	39	36	33	28	23				
SP-2512	12	1.1	1.5	77					68	67	66	64	63	60	56	50	44	37				
SP-2517	17	1.5	2.0	108					96	94	93	90	88	84	77	70	63	54				
SP-2521	21	2.2	3.0	134					118	115	113	111	108	103	96	87	77	67				
SP-2525	25	2.2	3.0	157					138	136	133	129	127	121	113	103	90	78				
SP-2533	33	3.0	4.0	209					184	180	176	172	168	159	149	137	123	105				
SP-2538	38	4.0	5.5	242					212	208	204	199	194	185	172	158	142	123				
SP-2544	44	4.0	5.5	279					247	242	237	231	226	215	202	187	166	143				

Dimensions And Weights

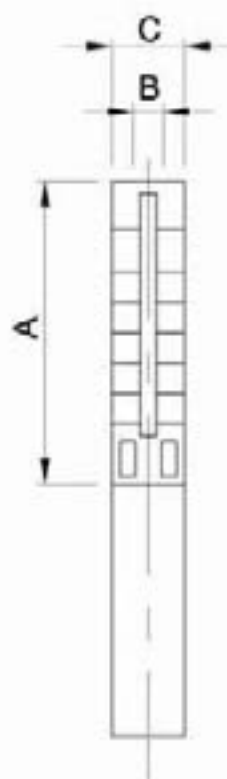

Pump Type	Dimensions(mm)			Net Weight(Kg)
	A	B	C	
SP-2504	251	RP/NPT 1 1/2"	98	2.0
SP-2506	293		98	2.4
SP-2508	335		98	2.8
SP-2512	419		98	3.6
SP-2517	524		98	4.5
SP-2521	608		98	5.3
SP-2525	692		98	6.0
SP-2533	868		98	9.6
SP-2538	973		98	10.9
SP-2544	1099		98	12.4


C = Maximum diameter of pump inclusive of cable guard and motor

Stairs SP Series



SP 4"


SP40 Performance Curves

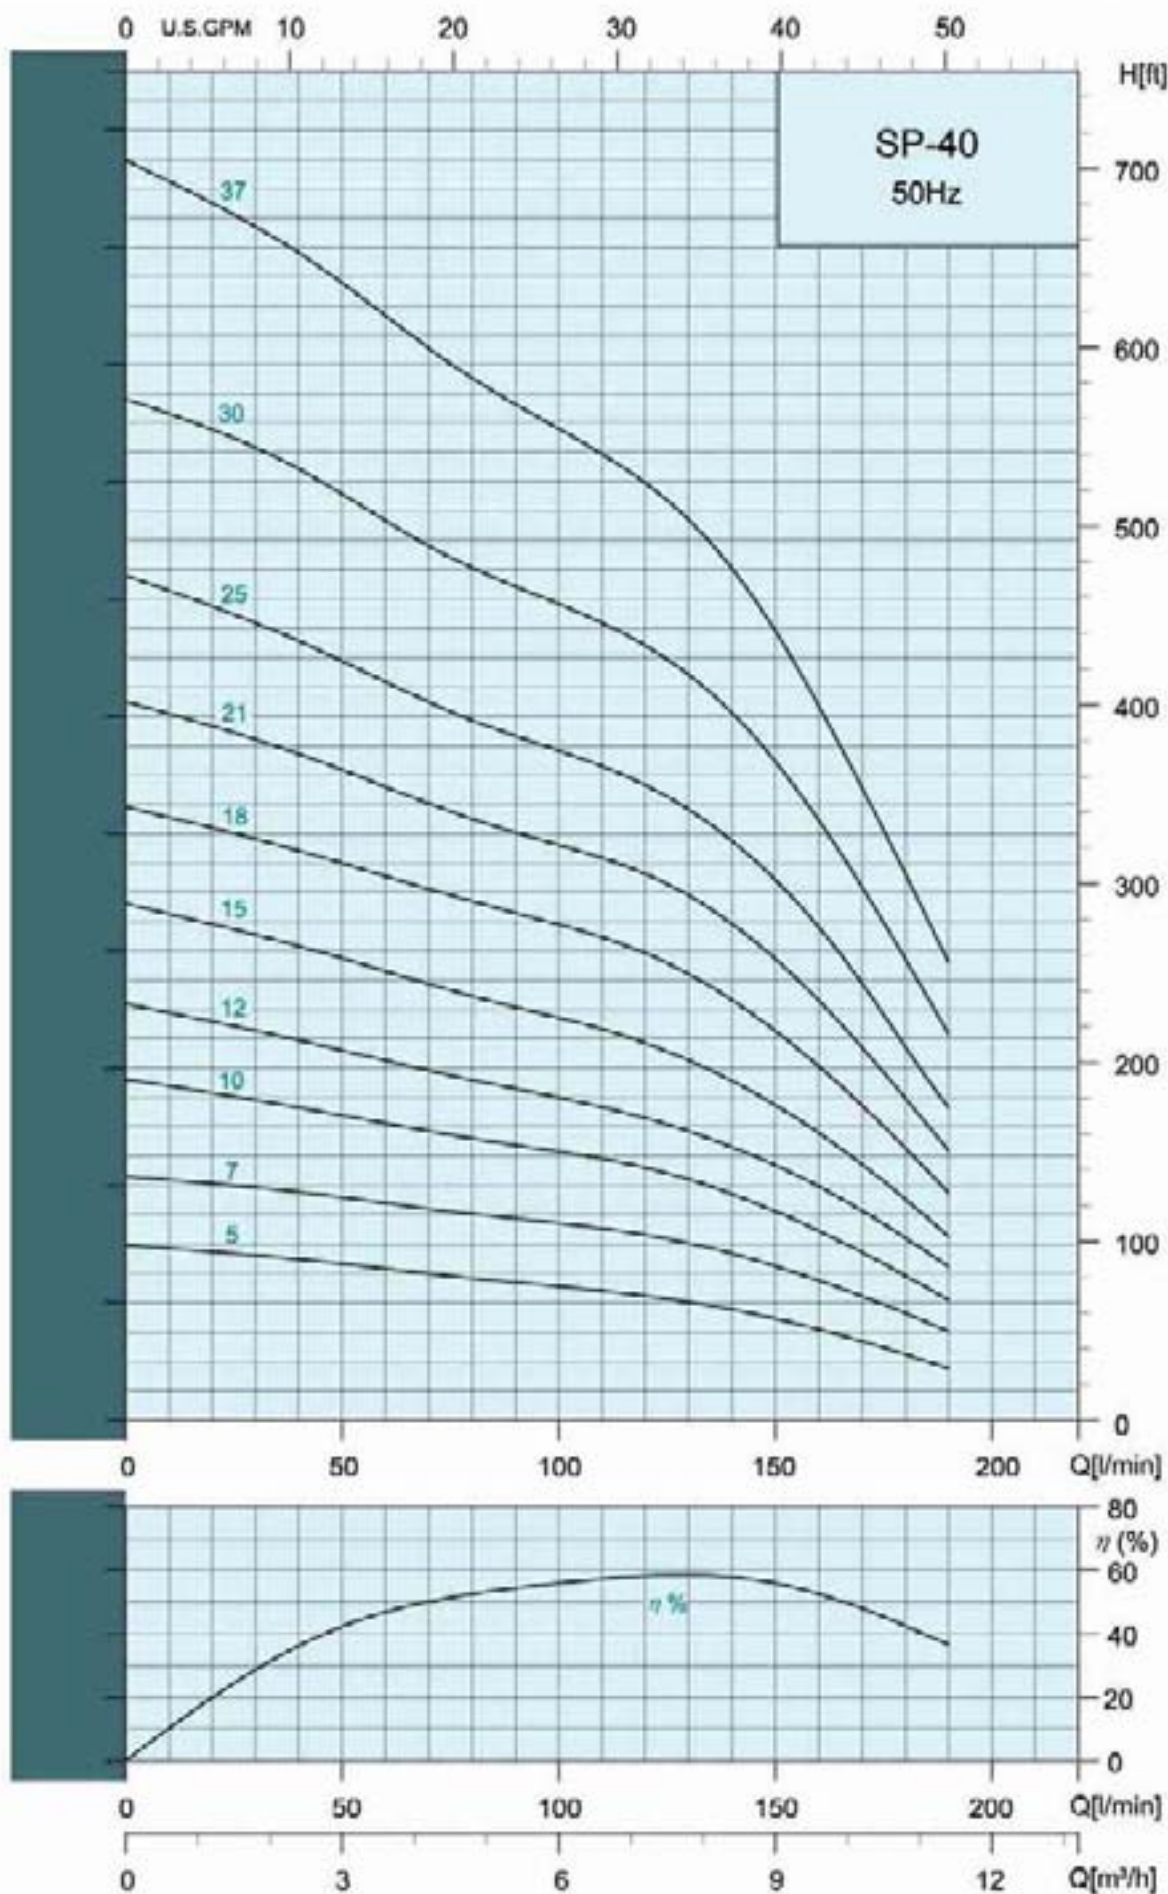

Selection Chart

Pump Type	STAGES	KW	HP	Q=DELIVERY																		
				l/min	0	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200	250	300
				m ³ /h	0	1.8	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	7.2	8.4	9.6	10.8	12	15	18
				H =TOTAL HEAD IN METERS																		
SP-4005	5	0.75	1.0	30			28	27	26	26	25	24	23	22	21	19	15	12				
SP-4007	7	1.1	1.5	41			38	37	36	36	35	35	34	34	32	27	24	17				
SP-4010	10	1.5	2.0	58			54	53	52	51	49	47	47	46	43	38	32	25				
SP-4012	12	2.2	3.0	71			65	64	63	61	60	58	57	55	52	47	40	31				
SP-4015	15	2.2	3.0	87			80	79	78	76	74	72	70	68	64	57	49	38				
SP-4018	18	3.0	4.0	104			98	96	95	93	90	88	86	84	79	72	60	47				
SP-4021	21	4.0	5.5	122			114	113	111	107	105	102	100	98	93	85	72	55				
SP-4025	25	4.0	5.5	144			133	131	128	126	123	119	116	114	107	97	84	64				
SP-4030	30	5.5	7.5	174			163	160	157	154	149	145	142	139	131	120	103	79				
SP-4037	37	5.5	7.5	215			199	198	194	188	183	177	173	169	160	145	122	93				

Dimensions And Weights

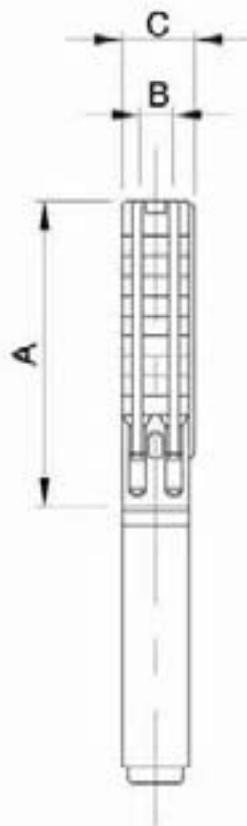

Pump Type	Dimensions(mm)			Net Weight(Kg)
	A	B	C	Pump
SP-4005	412	RP/NPT 2"	98	4.3
SP-4007	496		98	5.3
SP-4010	622		98	6.8
SP-4012	706		98	7.8
SP-4015	832		98	9.3
SP-4018	958		98	10.8
SP-4021	1084		98	12.3
SP-4025	1252		98	14.3
SP-4030	1462		98	16.8
SP-4037	1753		98	20.3


C = Maximum diameter of pump inclusive of cable guard and motor

Stairs SP Series



SP 4"


SP70 Performance Curves

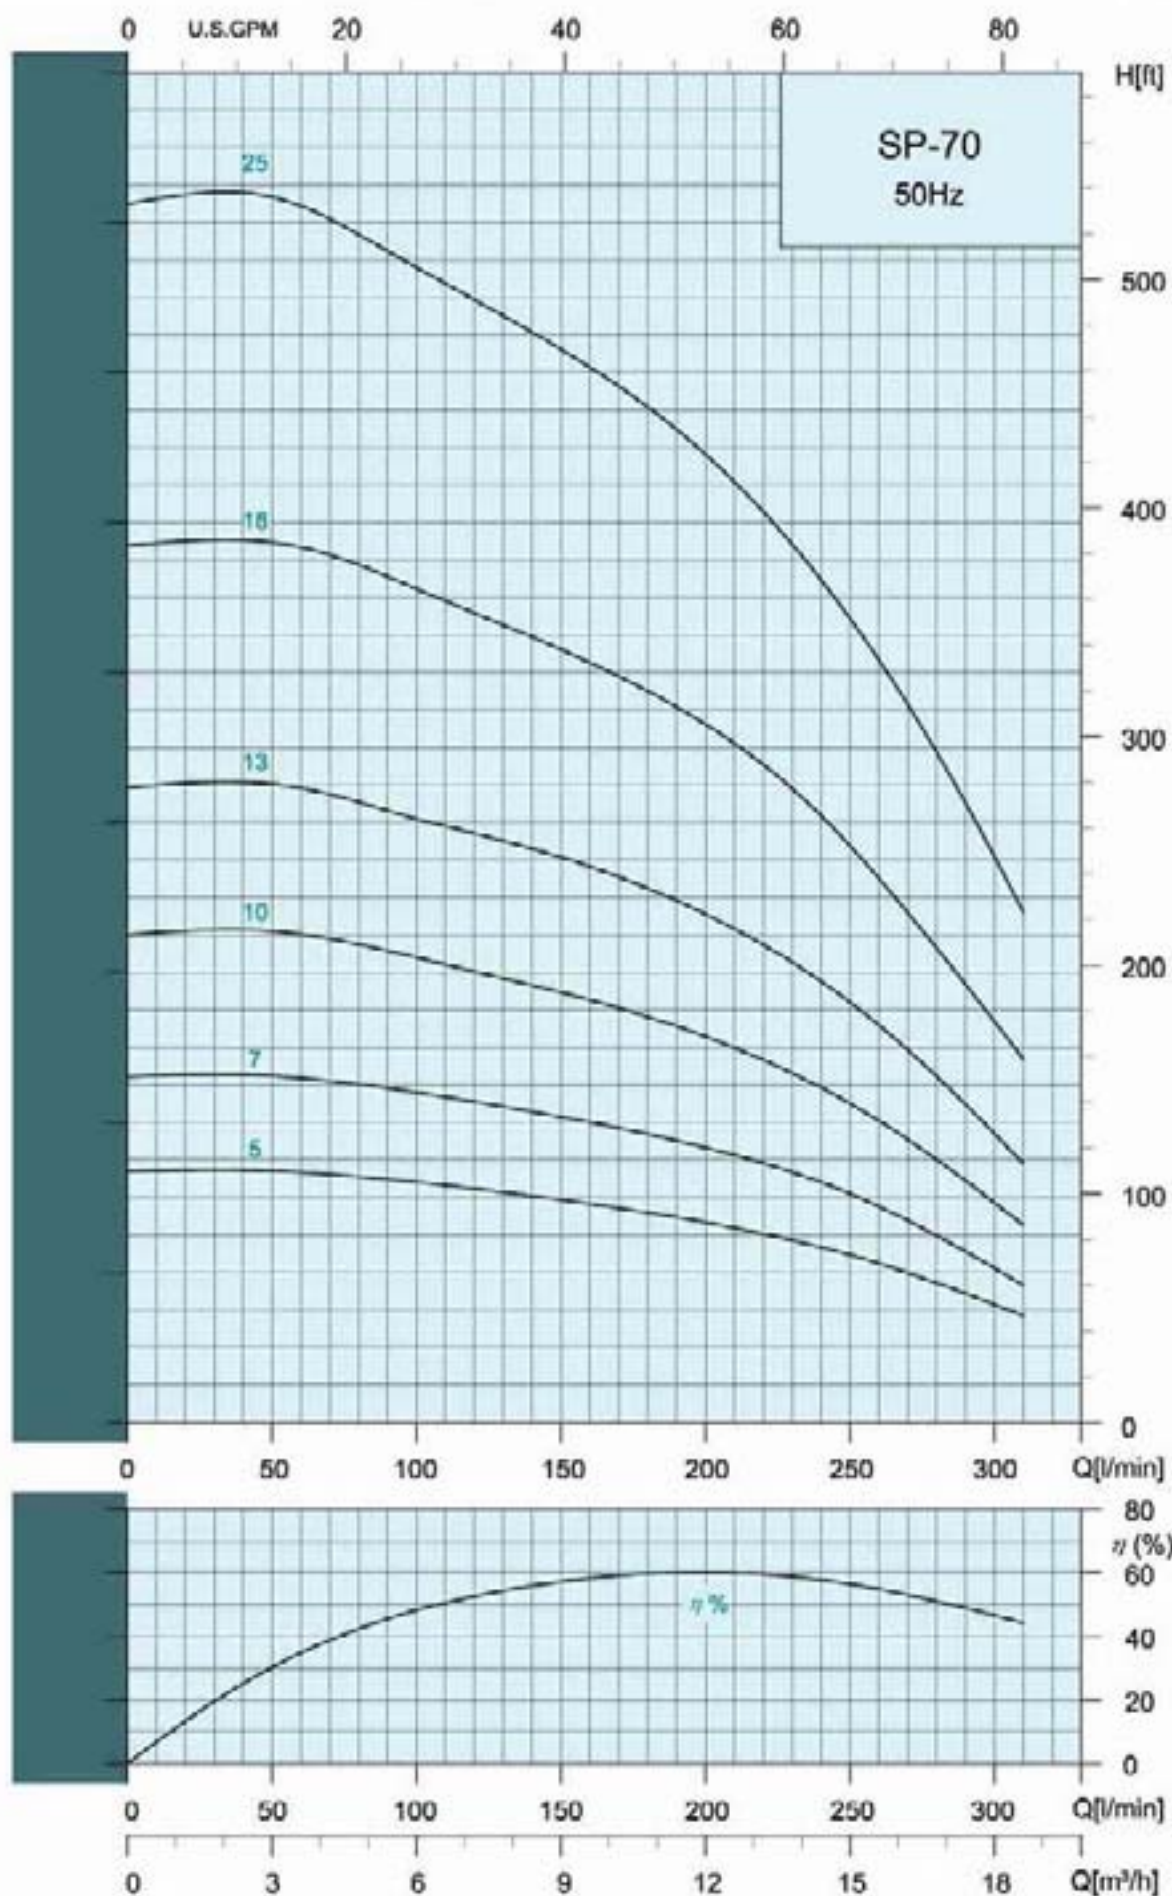

Selection Chart

Pump Type	STAGES	KW	HP	Q=DELIVERY															
				l/min	70	80	90	100	120	140	160	180	200	250	300	320	340	360	380
				m ³ /h	4.2	4.8	5.4	6.0	7.2	8.4	9.6	10.8	12	15	18	19	20	22	23
H = TOTAL HEAD IN METERS																			
SP-7005	5	1.5	2.0	33				32	31	30	28	27	26	22	18				
SP-7007	7	2.2	3.0	48				44	43	42	40	37	36	30	20				
SP-7010	10	3.0	4.0	65				62	60	58	57	54	52	43	29				
SP-7013	13	4.0	5.5	84				80	78	77	74	72	67	56	38				
SP-7018	18	5.5	7.5	117				111	108	104	102	97	93	77	54				
SP-7025	25	7.5	10	163				154	149	145	141	135	129	107	75				

Dimensions And Weights

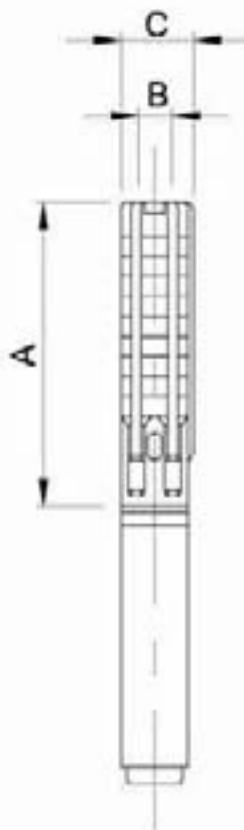

Pump Type	Dimensions(mm)			Net Weight(Kg)
	A	B	C	Pump
SP-7005	505	RP/NPT 2"	98	5.0
SP-7007	635		98	6.3
SP-7010	830		98	8.2
SP-7013	1025		98	10.2
SP-7018	1350		98	13.4
SP-7025	1805		98	17.8


C = Maximum diameter of pump inclusive of cable guard and motor

Stairs SP Series




SP 6"

SP90 Performance Curves

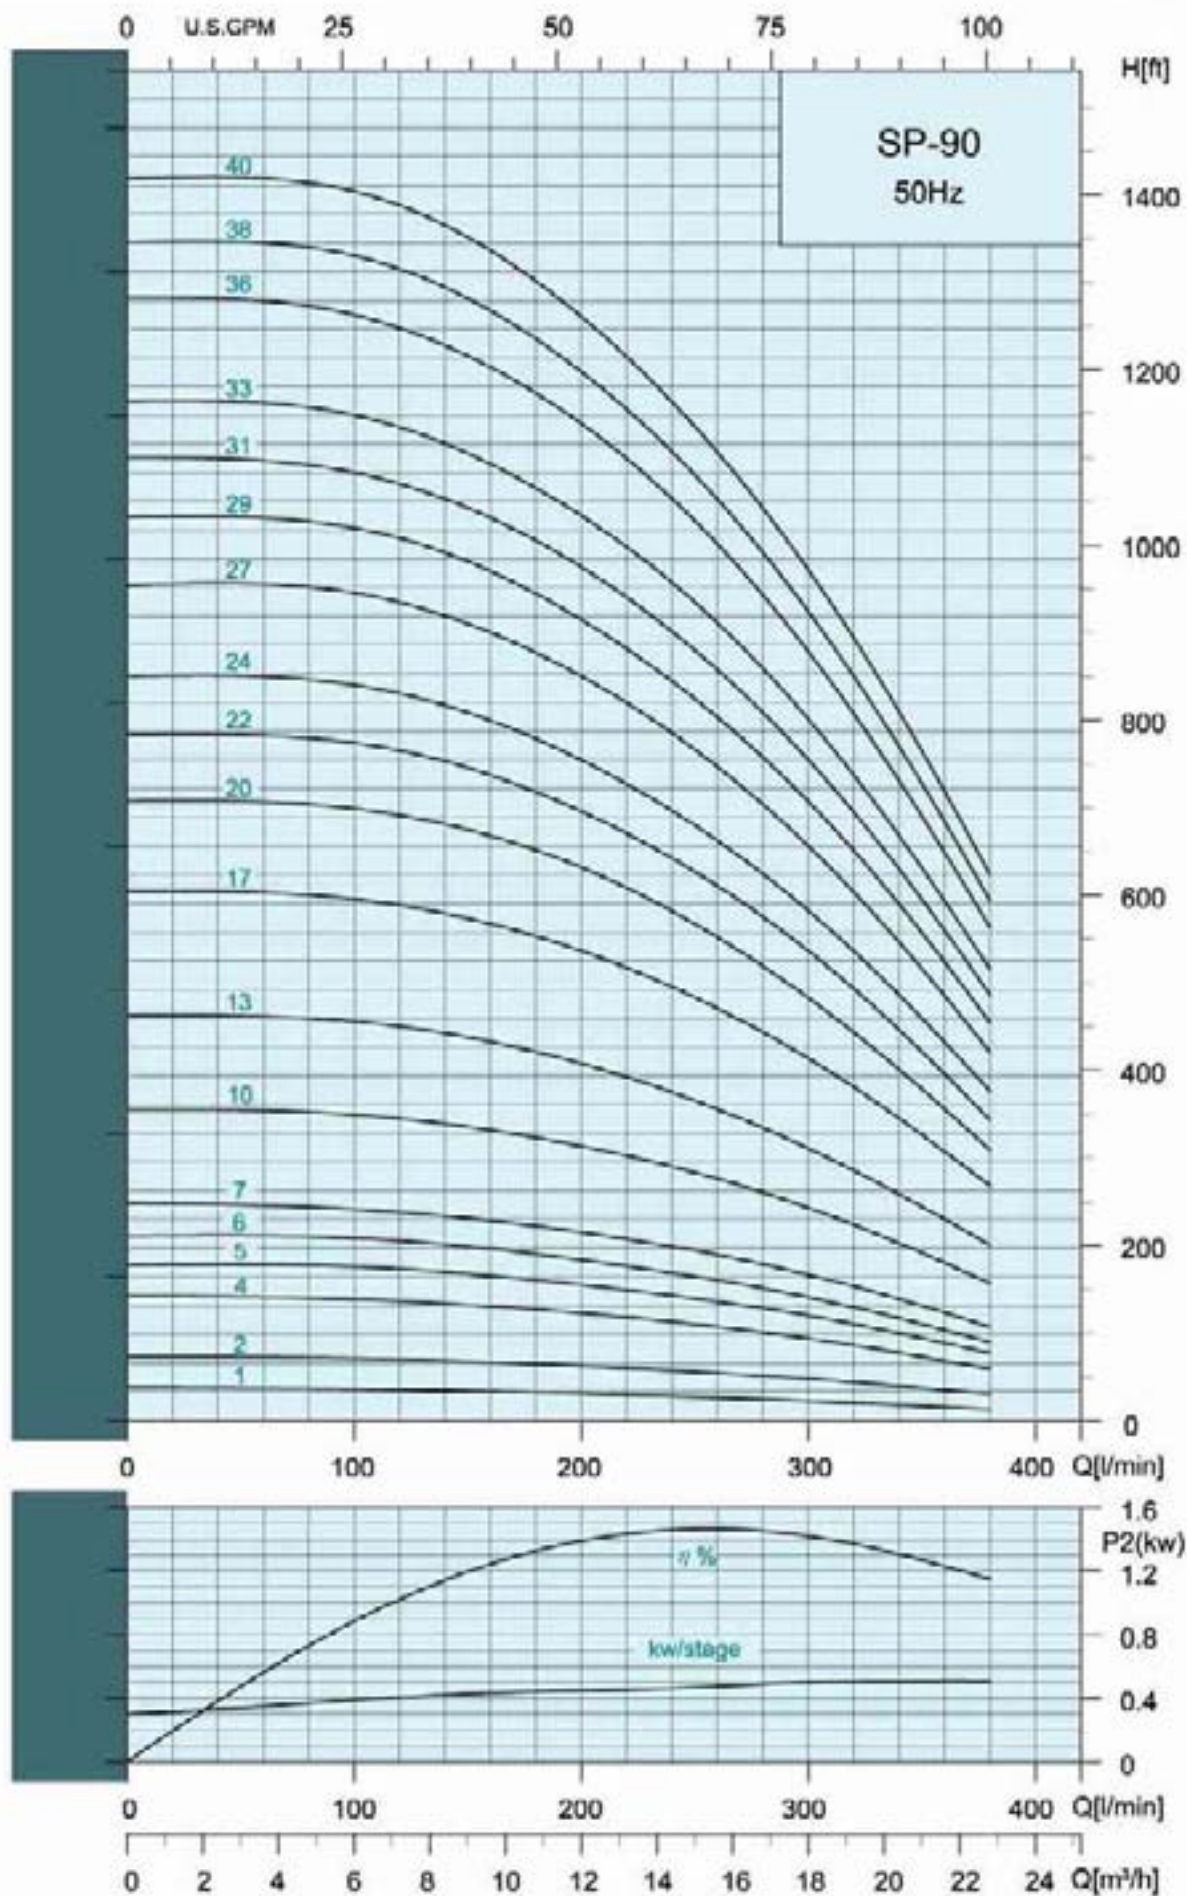

Selection Chart

Pump Type	Motor		Max current		m ³ /h l/min	Q capacity 2900 rpm							
	P2		Amp			3	6	9	12	15	18	21	23
	KW	HP	220V	380V		50	100	150	200	250	300	350	383
SP 90-1	0.55	0.75	2.6	1.5	HEAD IN METERS	11.5	11	10.5	9.5	8	7	6	4
SP 90-2	1.1	1.5	5.2	3.0		22	21.5	20	19	17.5	14	12	9
SP 90-4	2.2	3	9.5	5.5		42.5	42	40	38	33	28.5	23	18
SP 90-5	3	4	13.3	7.7		53	52	50.5	47.5	42.5	37	28.5	22
SP 90-6	3.7	5	15.4	8.9		64	63	60	56	50	43	34	27
SP 90-7	4	5.5	17	10.4		75	74	70	66	59	50.5	40	32
SP 90-10	5.5	7.5	22.2	12.8		108	107	102	95	86	74	58	48
SP 90-13	7.5	10	28.5	16.5		141	139	133	124	112	95	75	60
SP 90-17	9.3	12.5	36	20.9		184	182	175	163	147	126	100	80
SP 90-20	11	15	41.8	24.2		216	213	206	192	173	147	116	95
SP 90-22	13	17.5	50	29		239	237	228	212	190	163	129	105
SP 90-24	13	17.5	50	29		260	257	247	230	208	178	140	115
SP 90-27	15	20	55	32		291	288	277	259	234	200	158	128
SP 90-29	18.5	25	69	40		314	311	300	279	250	215	170	138
SP 90-31	18.5	25	69	40		335	330	318	298	269	230	181	148
SP 90-33	18.5	25	69	40		355	350	337	315	285	243	191	157
SP 90-36	22	30	81	47		390	385	371	348	313	268	210	170
SP 90-38	22	30	81	47		410	405	390	385	330	281	222	180
SP 90-40	22	30	81	47		433	428	412	384	346	296	235	190

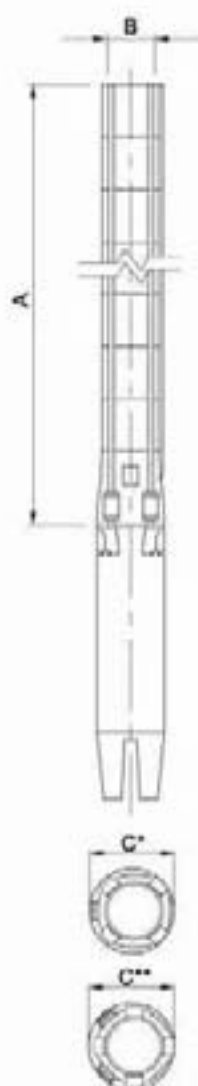

Dimensions And Weights

Pump Type	Dimensions(mm)				Net Weight(Kg)
	A	B	C*	C**	Pump
SP 90-1	343	RP 2 1/2" NPT 3"	131		5
SP 90-2	403		131		6.4
SP 90-4	524		131		9.3
SP 90-5	585		131		10.8
SP 90-6	645		131		12.2
SP 90-7	706		131		13.7
SP 90-10	887		131		18
SP 90-13	1069		142	142	22.4
SP 90-17	1311		142	142	28.2
SP 90-20	1492		142	142	32.5
SP 90-22	1613		142	142	35.4
SP 90-24	1734		142	142	38.3
SP 90-27	1916		142	142	42.7
SP 90-29	2037		142	142	45.6
SP 90-31	2158		142	142	48.5
SP 90-33	2279		142	142	51.4
SP 90-36	2460		142	142	55.7
SP 90-38	2581		142	142	58.6
SP 90-40	2702		142	142	61.5

C*: Maximum diameter of pump with one motor cable


C**: Maximum diameter of pump with two motor cable

Stairs SP Series




SP 6"

SP150 Performance Curves

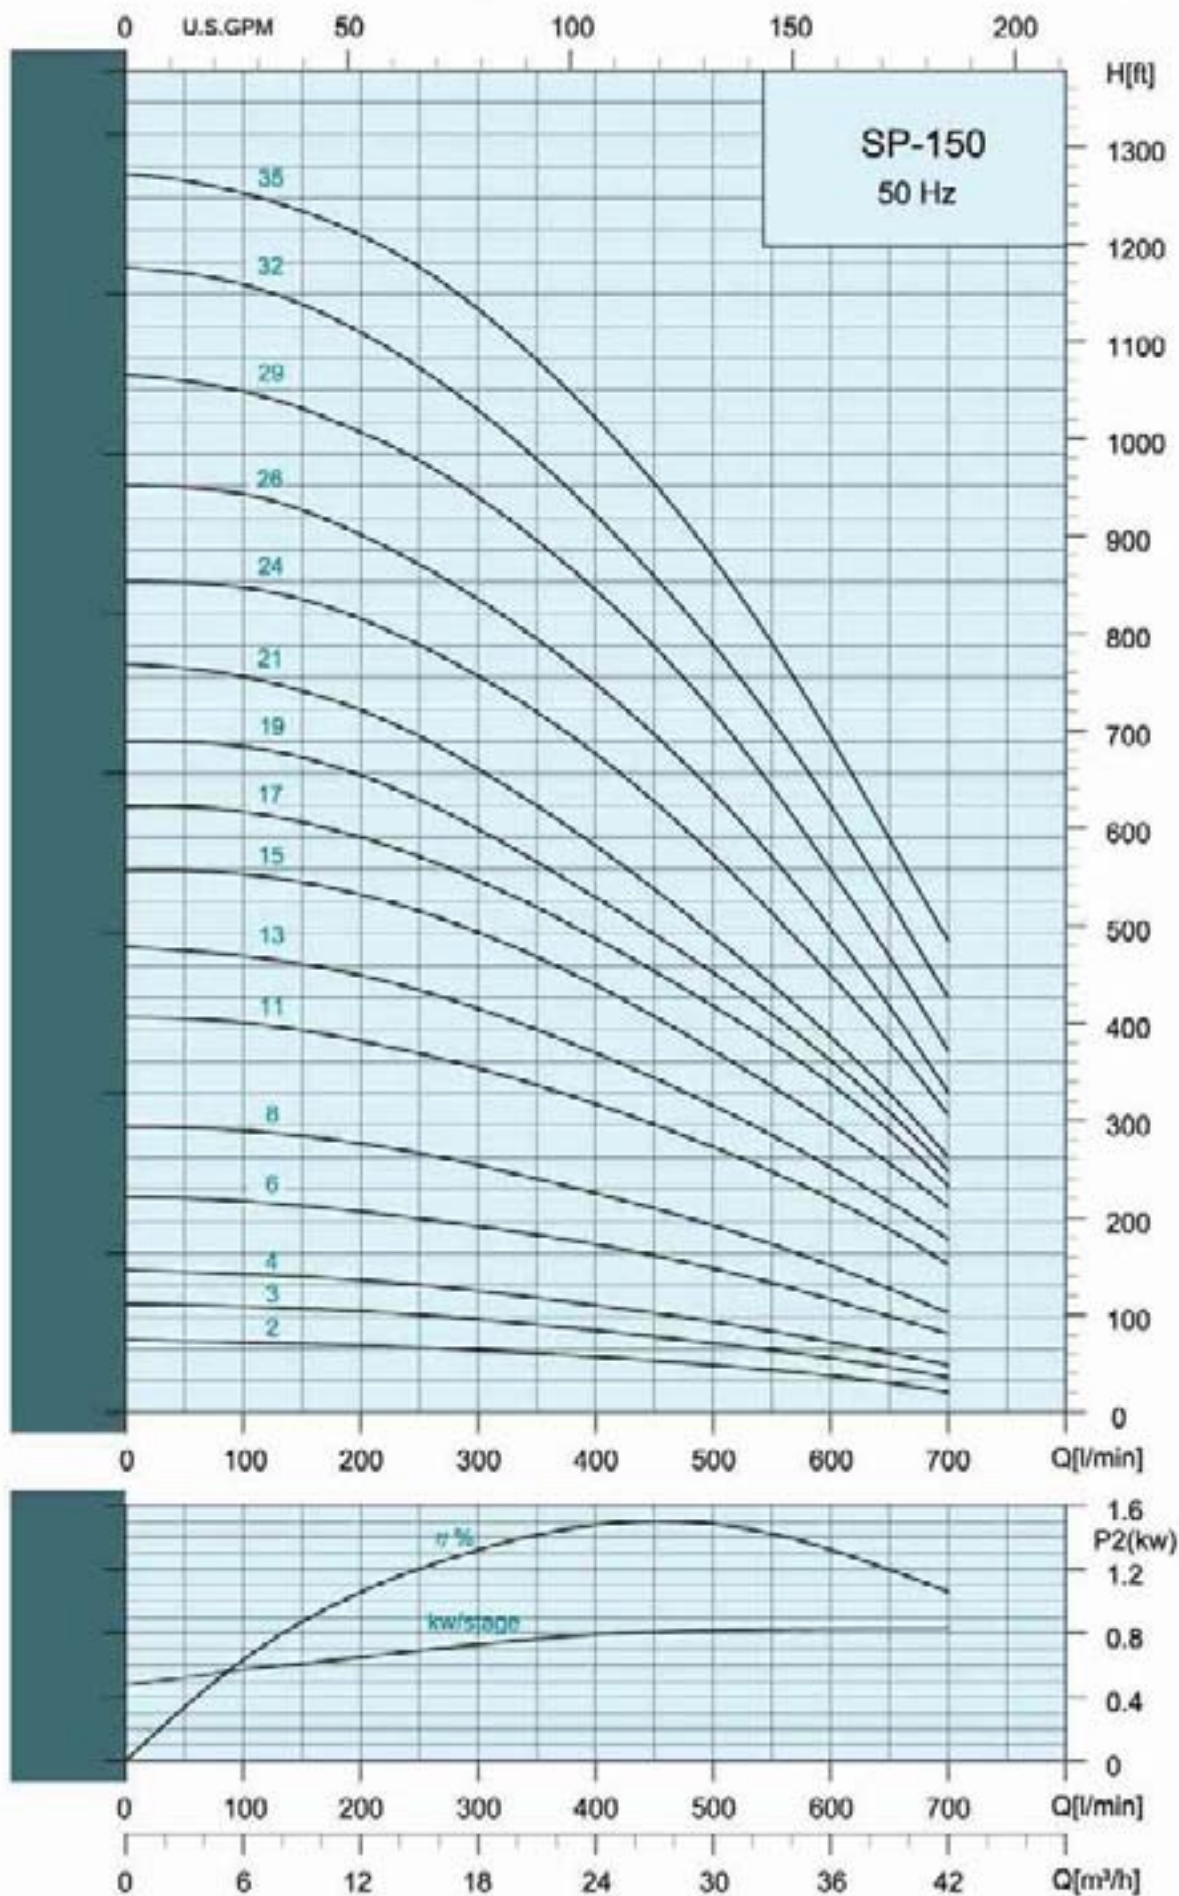

Selection Chart

Pump Type	Motor		Max.current		m ³ /h l/min	Q capacity 2900 rpm												
	P2		Amp			6	9	12	15	18	21	24	27	30	33	36	39	42
	KW	HP	220V	380V		100	150	200	250	300	350	400	450	500	550	600	650	700
SP150-2	2.2	3	9.5	5.5	23	22	21	20	19	18	17	16	15	13	11	9	6	
SP150-3	3	4	13.3	7.7	33	32	31	30	29	28	26	24	22	20	17	14	11	
SP150-4	3.7	5	15.4	8.9	43	42	41	40	38	36	34	31	28	26	23	19	15	
SP150-6	5.5	7.5	22.2	12.8	67	64	62	60	58	56	52	49	45	40	36	30	25	
SP150-8	7.5	10	28.5	16.5	88	87	84	81	78	73	68	64	58	53	46	38	31	
SP150-11	11	15	41.8	24.2	122	120	117	112	108	102	97	90	83	76	67	57	47	
SP150-13	11	15	41.8	24.2	143	140	137	132	127	120	113	105	97	87	77	66	55	
SP150-15	15	20	55	32	168	166	162	157	150	142	134	124	113	102	90	77	65	
SP150-17	15	20	55	32	188	185	180	173	167	158	148	138	127	116	103	88	71	
SP150-19	18.5	25	69	40	208	205	199	192	182	172	161	150	137	125	110	94	77	
SP150-21	18.5	25	69	40	230	226	220	212	202	190	177	164	149	134	117	100	80	
SP150-24	22	30	81	47	258	254	248	240	230	219	207	191	175	156	137	117	93	
SP150-26	22	30	81	47	287	282	275	266	255	242	227	212	194	173	152	127	100	
SP150-29	26	35	96	56	319	314	307	298	287	273	257	240	220	196	170	143	113	
SP150-32	30	40	111	64	353	347	338	327	313	298	281	261	240	217	190	160	130	
SP150-35	30	40	111	64	382	377	368	358	346	329	311	290	267	240	211	180	148	

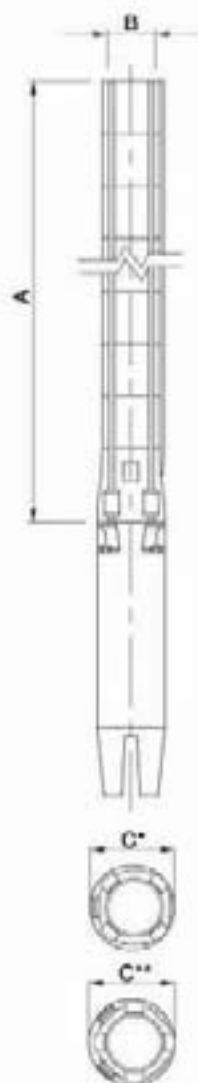

Dimensions And Weights

Pump Type	Dimensions(mm)				Net Weight(Kg)
	A	B	C*	C**	Pump
SP150-2	462	NPT/ RP 3"	131		8.4
SP150-3	558		131		10.1
SP150-4	654		131		11.8
SP150-6	846		131		15.2
SP150-8	1038		142	142	18.6
SP150-11	1326		142	142	23.6
SP150-13	1518		142	142	27
SP150-15	1710		142	142	30.4
SP150-17	1902		142	142	33.8
SP150-19	2094		142	142	37.2
SP150-21	2286		142	142	40.6
SP150-24	2574		142	142	45.6
SP150-26	2766		142	142	49
SP150-29	3054		142	142	54.1
SP150-32	3342		142	142	59.2
SP150-35	3630		142	142	64.3

C*: Maximum diameter of pump with one motor cable


C**: Maximum diameter of pump with two motor cable

Stairs SP Series




SP 6"

SP230 Performance Curves

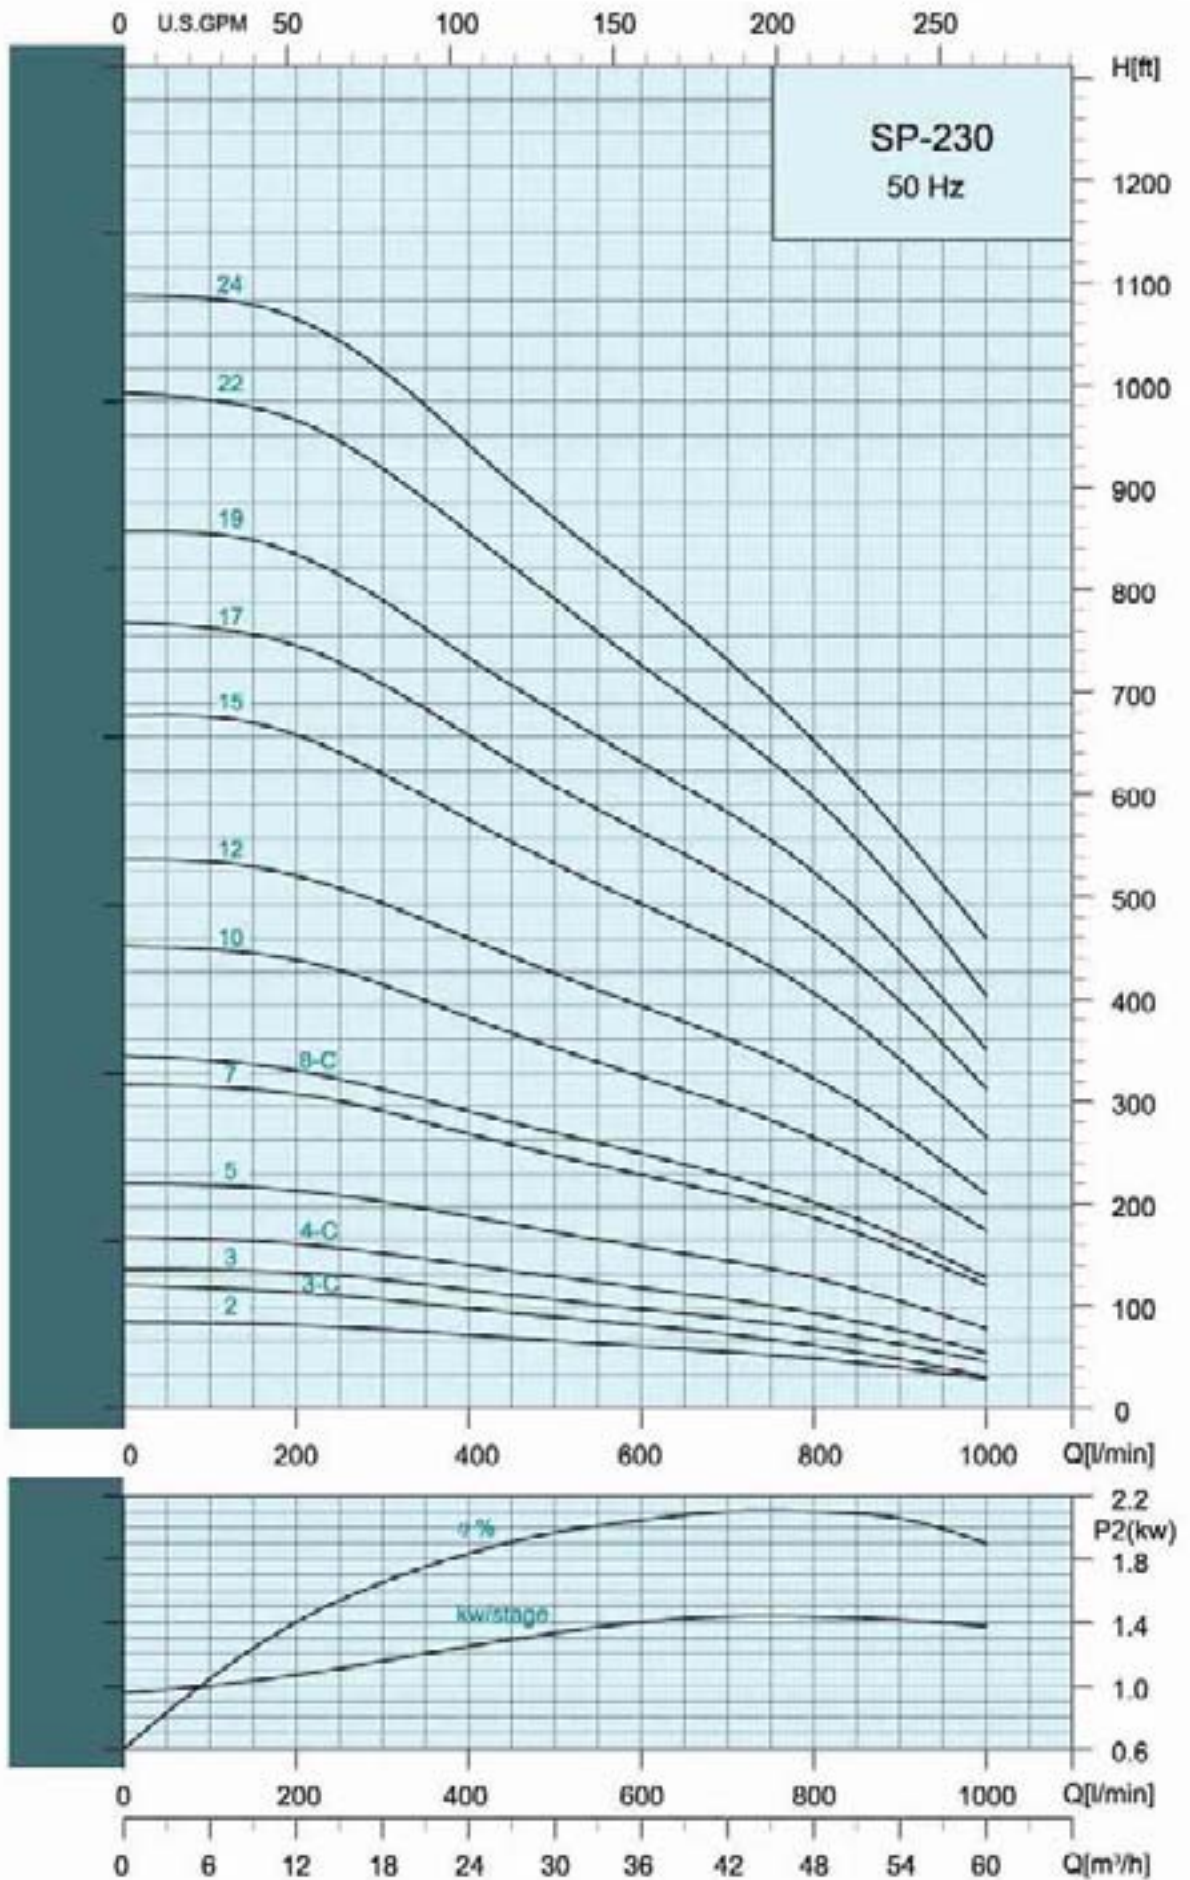

Selection Chart

Pump Type	Motor		Max.current		m ³ /h l/min	Q capacity 2900 rpm											
	P2		Amp			12	15	18	21	24	27	30	36	42	48	54	60
	KW	HP	220V	380V		200	250	300	350	400	450	500	600	700	800	900	1000
SP230-2	3	4	13.3	7.7	HEAD IN METERS	24	23.5	23	22.5	22	21	20	18	17	15	12	9
SP230-3C	3.7	5	15.4	8.9		35	34	32	31	29	28	27	24	22	19	14	10
SP230-3	5.5	7.5	22.2	12.8		40	39	38	37	35	34	33	29	27	23	18	14
SP230-4C	5.5	7.5	22.2	12.8		49	47	46	45	43	41	39	36	32	28	23	17
SP230-5	7.5	10	28.5	16.5		65	63	61	59	57	55	53	48	44	39	32	24
SP230-7	11	15	41.8	24.2		94	92	88	85	82	79	76	70	64	57	47	37
SP230-8C	11	15	41.8	24.2		100	98	95	92	88	85	82	76	69	61	51	39
SP230-10	15	20	55	32		133	130	127	122	117	112	107	98	90	80	67	53
SP230-12	18.5	25	69	40		158	155	150	145	140	135	130	120	110	98	83	64
SP230-15	22	30	81	47		200	195	189	183	176	169	163	150	138	124	103	81
SP230-17	28	35	96	58		227	222	215	208	200	193	186	172	158	143	121	98
SP230-19	30	40	111	64		254	248	241	233	224	216	208	193	178	160	136	107
SP230-22	37	50	138	80		294	288	280	270	260	251	241	222	203	183	155	123
SP230-24	37	50	138	80		325	317	309	298	287	276	265	244	223	199	171	140

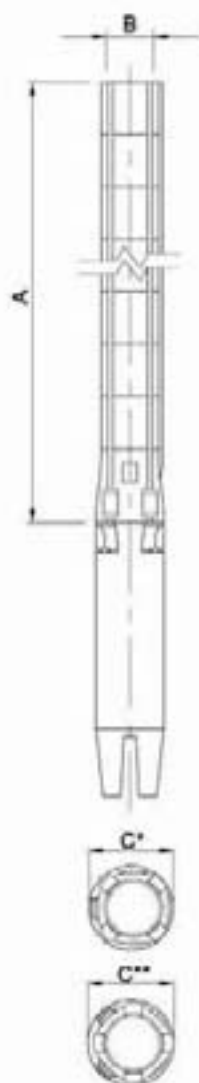

Dimensions And Weights

Pump Type	Dimensions(mm)				Net Weight(Kg)
	A	B	C*	C**	Pump
SP230-2	496	NPT/RP 3" or 4"	146		9.2
SP230-3-C	609		146		11.5
SP230-3	609		146		11.5
SP230-4-C	722		146		13.8
SP230-5	835		149	152	16
SP230-7	1061		149	152	20.6
SP230-8-C	1174		149	152	22.9
SP230-10	1400		149	152	27.4
SP230-12	1626		149	152	32
SP230-15	1965		149	152	38.8
SP230-17	2191		149	152	43.4
SP230-19	2417		149	152	47.9
SP230-22	2756		149	152	54.8
SP230-24	2982		149	152	59.3

C*: Maximum diameter of pump with one motor cable


C**: Maximum diameter of pump with two motor cable

Stairs SP Series




SP 6"

SP300 Performance Curves

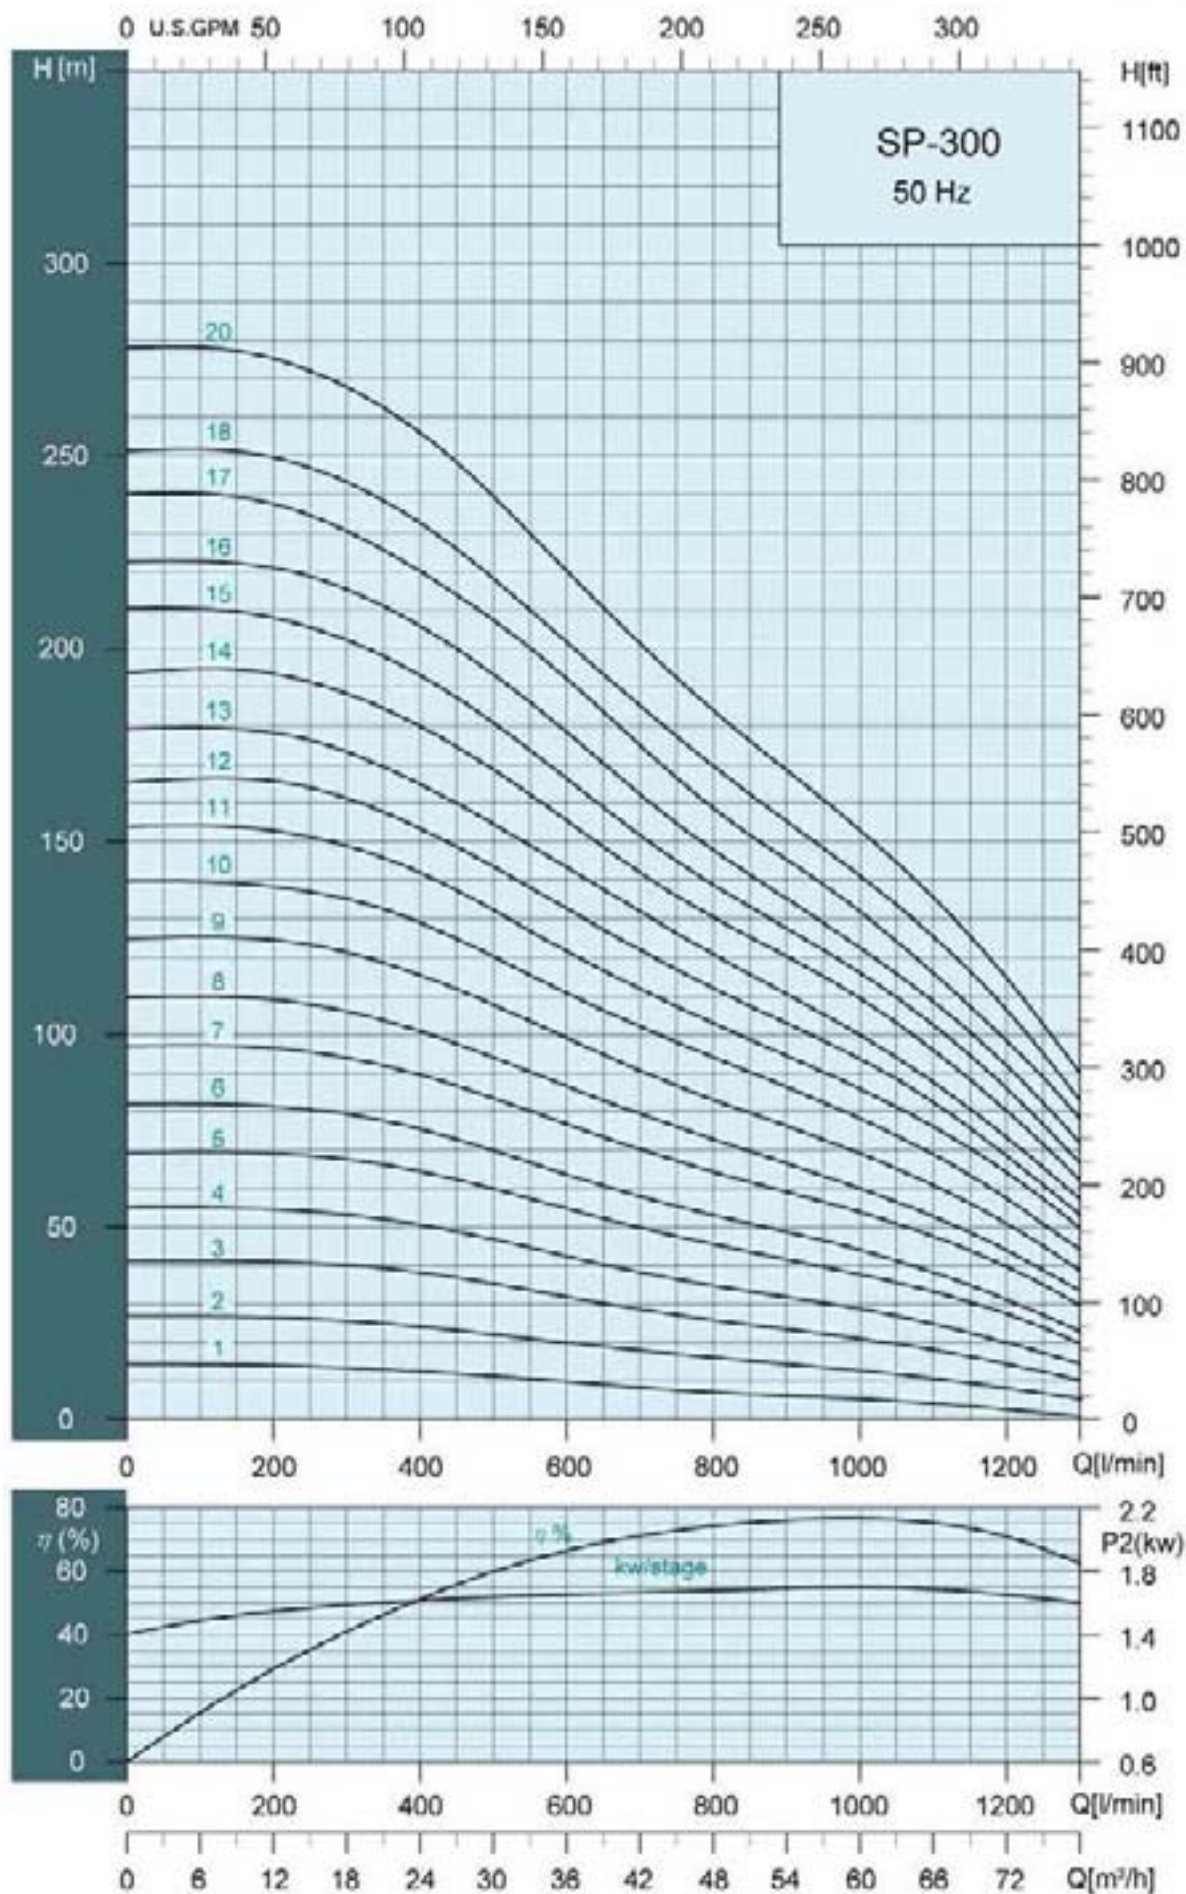

Selection Chart

Pump Type	Motor		Max. current		m ³ /h l/min	Q capacity 2900 rpm												
	P2		Amp			18	21	24	27	30	36	42	48	54	60	66	72	78
	KW	HP	220V	380V		300	350	400	450	500	600	700	800	900	1000	1100	1200	1300
SP300-1	2.2	3	9.5	5.5	HEAD IN METERS	13	12.5	12	11.5	11	10	8	7	6	5	4	2	1
SP300-2	4	5.5	15.4	8.9		26	25	24	23	22	20	18	16	14	13	11	8	5
SP300-3	5.5	7.5	22.2	12.8		40	39	38	37	36	32	28	26	24	21	18	14	10
SP300-4	7.5	10	28.5	16.5		53	52	51	48	47	43	38	35	32	28	25	20	14
SP300-5	9.3	12.5	38	20.9		67	66	64	62	60	55	50	48	42	38	33	27	19
SP300-6	11	15	41.8	24.2		79	78	76	73	70	64	58	53	48	44	38	32	23
SP300-7	13	17.5	50	29		94	92	89	86	84	77	70	64	59	54	47	40	29
SP300-8	15	20	55	32		106	104	101	97	94	87	80	73	67	60	53	44	33
SP300-9	18.5	25	69	40		122	118	116	112	108	99	91	83	76	69	61	51	38
SP300-10	18.5	25	69	40		135	132	128	125	120	111	102	95	87	78	68	57	45
SP300-11	22	30	81	47		148	146	142	137	132	122	112	103	95	86	76	64	49
SP300-12	22	30	81	47		162	157	153	146	143	133	122	112	103	94	83	68	53
SP300-13	26	35	96	56		173	169	165	160	155	143	132	121	110	100	87	73	57
SP300-14	26	35	96	56		188	184	180	175	168	156	142	130	120	109	96	80	63
SP300-15	26	35	96	56		203	197	193	187	180	166	152	138	127	116	103	86	67
SP300-16	30	40	111	64		216	211	206	200	193	178	162	148	135	123	108	92	72
SP300-17	37	50	138	80		230	226	220	214	207	192	175	158	145	132	116	97	78
SP300-18	37	50	138	80		243	238	233	226	218	202	185	170	155	141	126	107	83
SP300-20	37	50	138	80		267	263	256	248	239	220	201	184	168	153	136	115	90

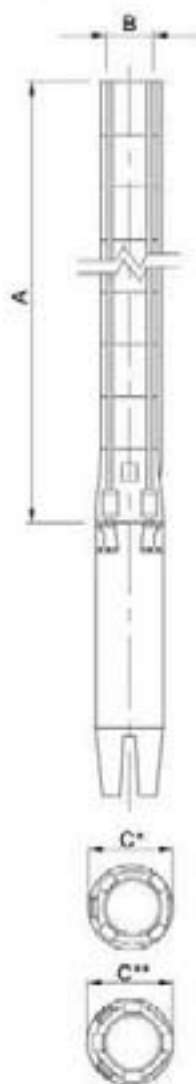

Dimensions And Weights

Pump Type	Dimensions(mm)				Net Weight(Kg) Pump
	A	B	C*	C**	
SP300-1	383	NPT/RP 3" or 4"	146		6.9
SP300-2	496		146		9.2
SP300-3	609		148		11.5
SP300-4	722		149	152	13.7
SP300-5	835		149	152	16
SP300-6	948		149	152	18.3
SP300-7	1061		149	152	20.6
SP300-8	1174		149	152	22.9
SP300-9	1287		149	152	25.1
SP300-10	1400		149	152	27.4
SP300-11	1513		149	152	29.7
SP300-12	1626		149	152	32
SP300-13	1739		149	152	34.3
SP300-14	1852		149	152	36.5
SP300-15	1965		149	152	38.8
SP300-16	2078		149	152	41.1
SP300-17	2191		149	152	43.4
SP300-18	2304		149	152	45.7
SP300-20	2530		149	152	50.2

C*: Maximum diameter of pump with one motor cable

C**: Maximum diameter of pump with two motor cable